

High thermal yields, ease of cleaning and flexibility of use are the hallmarks of the tubular, heating elements with a traditional design that furnish any living trend with style.

The production of tubular is carried out with the most modern construction technologies, through robotic production lines and highly specialized welding processes to guarantee perfect execution, absolute cleanliness and reliability over the years.



The painting is performed exclusively with the use of ecological epoxy powder paints through a process of 12 distinct phases to ensure excellent results that last over the years and an unmatched brilliance.

MATERIAL


Moulded heads in mild steel
Electro-welded mild steel tubes 25mm

Packaging

The radiator is protected by a recycled film in polyethylene and with a box in recycled carbon. User notice included.

Painting Process

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2.)

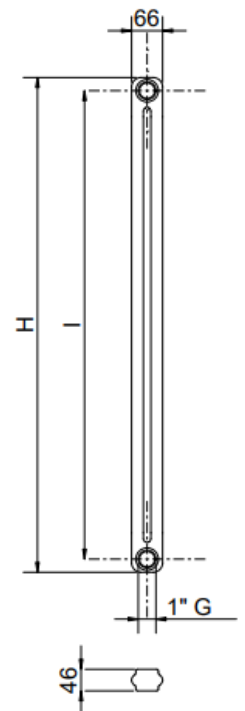

WARRANTY
5 YEARS

CERTIFICATES



Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

Code	Height	Width	Volume	Surface	Weight	n. of tubes	Output	
Codice	Altezza	Larghezza	Volume	Superficie	Peso	n° tubi	Resa Termica	
Kode	Höhe	Breite	Volumen	Oberflächlich	Gewicht	Röher N.	Leistungsfähigkeit	
Còdigo	Altura	Ancho	Volumen	Superficial	Peso	n. de tubos	Potencia tèrmica	
	H(mm)	L(mm)	dm ³	m ²	Kg		Watt Δ50°C/Δ30°C	
20207	207	46	0.29	0.03	0.35	2	16	8
20300	300	46	0.37	0.05	0.49	2	22	12
20400	400	46	0.45	0.06	0.63	2	28	15
20500	500	46	0.53	0.08	0.77	2	37	19
20556	556	46	0.58	0.09	0.85	2	44	22.9
20586	586	46	0.60	0.09	0.89	2	46.1	23.9
20600	600	46	0.61	0.09	0.91	2	44	23
20626	626	46	0.63	0.12	0.95	2	48.9	26.3
20656	656	46	0.66	0.10	0.99	2	51	26.3
20676	676	46	0.67	0.11	1.02	2	52.4	27
20750	750	46	0.73	0.12	1.12	2	55	29
20756	756	46	0.74	0.12	1.13	2	58	29.7
20786	786	46	0.76	0.10	1.18	2	60.1	30.7
20856	856	46	0.82	0.13	1.27	2	65.1	33.1
20876	876	46	0.83	0.14	1.30	2	66.5	33.7
20900	900	46	0.85	0.14	1.33	2	67	35
20926	926	46	0.78	0.14	1.29	2	70	35.4
21000	1000	46	0.93	0.15	1.48	2	73	38
21200	1200	46	1.09	0.18	1.76	2	86	45
21500	1500	46	1.33	0.23	2.18	2	106	56
21656	1656	46	1.46	0.25	2.40	2	123.1	61.6
21800	1800	46	1.58	0.28	2.60	2	125	66
21856	1856	46	1.62	0.28	2.69	2	140	74
22000	2000	46	1.74	0.31	2.89	2	140	74
22056	2056	46	1.78	0.31	2.98	2	154.2	77.2
22200	2200	46	1.90	0.34	3.17	2	154	81
22500	2500	46	2.14	0.38	3.59	2	174	91



Denotes specialist sizes not available through the website
Please contact showrooms for details

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on www.theradiatocentre.com All heat outputs are shown at an operating temperatures of 75/65/20 (Δt50°).

To recalculate to show at 90/70/20 (Δt60°) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.
Valves are not included in the prices quoted above

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344