

High thermal yields, ease of cleaning and flexibility of use are the hallmarks of the tubular, heating elements with a traditional design that furnish any living trend with style.

The production of tubular is carried out with the most modern construction technologies, through robotic production lines and highly specialized welding processes to guarantee perfect execution, absolute cleanliness and reliability over the years.



The painting is performed exclusively with the use of ecological epoxy powder paints through a process of 12 distinct phases to ensure excellent results that last over the years and an unmatched brilliance.

MATERIAL


Moulded heads in mild steel
Electro-welded mild steel tubes 25mm

Packaging

The radiator is protected by a recycled film in polyethylene and with a box in recycled carbon. User notice included.

Painting Process

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2.)

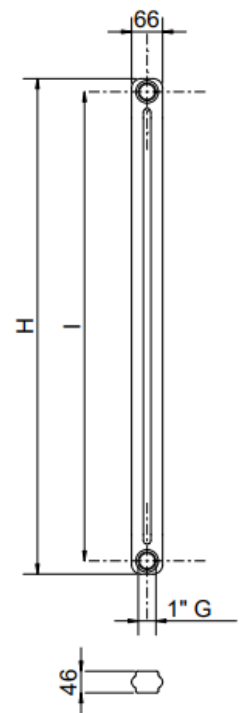


WARRANTY
5 YEARS

CERTIFICATES



Code	Height	Width	Volume	Surface	Weight	n. of tubes	Output	
Codice	Altezza	Larghezza	Volume	Superficie	Peso	n° tubi	Resa Termica	
Kode	Höhe	Breite	Volumen	Oberflächlich	Gewicht	Röher N.	Leistungsfähigkeit	
Còdigo	Altura	Ancho	Volumen	Superficial	Peso	n. de tubos	Potencia térmica	
	H(mm)	L(mm)	dm ³	m ²	Kg		Watt Δ50°C/Δ30°C	
30207	207	46	0.42	0.05	0.53	3	24.8	12.7
30300	300	46	0.54	0.07	0.74	3	34.7	18.1
30400	400	46	0.66	0.1	0.95	3	45.1	23.4
30500	500	46	0.79	0.12	1.16	3	55.2	28.5
30556	556	46	0.85	0.13	1.28	3	60.9	31.3
30586	586	46	0.89	0.14	1.34	3	63.8	32.8
30600	600	46	0.91	0.14	1.37	3	65.2	33.5
30626	626	46	0.94	0.15	1.43	3	67.8	34.7
30656	656	46	0.97	0.15	1.49	3	70.8	36.2
30676	676	46	1	0.16	1.53	3	72.8	34.2
30750	750	46	1.09	0.18	1.69	3	80	40.7
30756	756	46	1.09	0.18	1.7	3	80.6	41
30786	786	46	1.13	0.18	1.13	3	83.6	42.4
30856	856	46	1.21	0.2	1.91	3	90.4	45.7
30876	876	46	1.24	0.2	1.96	3	92.3	46.6
30900	900	46	1.27	0.21	2.01	3	94.6	47.7
30926	926	46	1.26	0.22	1.95	3	97.2	48.9
31000	1000	46	1.39	0.23	2.22	3	104.3	52.5
31200	1200	46	1.63	0.28	2.64	3	123.5	61.9
31500	1500	46	1.99	0.35	3.28	3	151.9	75.9
31656	1656	46	2.18	0.38	3.61	3	166.7	83.6
31800	1800	46	2.35	0.41	3.91	3	180.2	90.8
31856	1856	46	2.42	0.43	4.04	3	185.5	93.6
32000	2000	46	2.59	0.46	4.33	3	199	100.9
32056	2056	46	2.66	0.47	4.47	3	204.3	103.7
32200	2200	46	2.83	0.50	4.76	3	217.8	111.1
32500	2500	46	3.19	0.57	5.39	3	245.9	126.6

 Denotes specialist sizes not available through the website
Please contact showrooms for details

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on www.theradiatocentre.com All heat outputs are shown at an operating temperatures of 75/65/20 (Δ50°).
To recalculate to show at 90/70/20 (Δ60°) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.
Valves are not included in the prices quoted above

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

TheRadiatorCentre.com

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344