

High thermal yields, ease of cleaning and flexibility of use are the hallmarks of the tubular, heating elements with a traditional design that furnish any living trend with style.

The production of tubular is carried out with the most modern construction technologies, through robotic production lines and highly specialized welding processes to guarantee perfect execution, absolute cleanliness and reliability over the years.



The painting is performed exclusively with the use of ecological epoxy powder paints through a process of 12 distinct phases to ensure excellent results that last over the years and an unmatched brilliance.

### MATERIAL


Moulded heads in mild steel  
Electro-welded mild steel tubes 25mm

### Packaging

The radiator is protected by a recycled film in polyethylene and with a box in recycled carbon. User notice included.

### Painting Process

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2.)

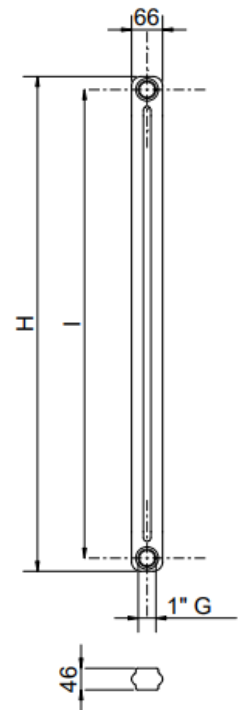


**WARRANTY**  
**5 YEARS**

### CERTIFICATES



Code	Height	Width	Volume	Surface	Weight	n. of tubes	Output	
Codice	Altezza	Larghezza	Volume	Superficie	Peso	n° tubi	Resa Termica	
Kode	Höhe	Breite	Volumen	Oberflächlich	Gewicht	Röher N.	Leistungsfähigkeit	
Còdigo	Altura	Ancho	Volumen	Superficial	Peso	n. de tubos	Potencia tèrmica	
	H(mm)	L(mm)	dm <sup>3</sup>	m <sup>2</sup>	Kg		Watt Δ50°C/Δ30°C	
40207	207	46	0.56	0.07	0.71	4	32	16.3
40300	300	46	0.72	0.1	0.99	4	46.8	24.5
40400	400	46	0.88	0.13	1.27	4	59.8	31.1
40500	500	46	1.04	0.16	1.55	4	72.4	37.3
40556	556	46	1.13	0.18	1.71	4	79.3	40.7
40586	586	46	1.18	0.19	1.79	4	83	42.5
40600	600	46	1.2	0.19	1.84	4	84.7	43.4
40626	626	46	1.24	0.2	1.91	4	87.9	44.9
40656	656	46	1.29	0.21	1.99	4	91.6	46.6
40676	676	46	1.32	0.21	2.05	4	94	47.8
40750	750	46	1.44	0.23	2.66	4	102.9	52
40756	756	46	1.45	0.24	2.28	4	103.6	52.4
40786	786	46	1.5	0.25	2.37	4	107.2	54.1
40856	856	46	1.61	0.27	2.56	4	115.6	58
40876	876	46	1.65	0.27	2.61	4	118	59.1
40900	900	46	1.68	0.28	2.68	4	120.8	60.4
40926	926	46	1.7	0.29	2.6	4	123.9	61.9
41000	1000	46	1.84	0.31	2.96	4	132.7	66.4
41200	1200	46	2.17	0.37	3.53	4	156.2	78.5
41500	1500	46	2.65	0.46	4.37	4	191.4	96.6
41656	1656	46	2.9	0.51	4.81	4	209.7	105.5
41800	1800	46	3.13	0.55	5.22	4	226.6	113.5
41856	1856	46	3.22	0.57	5.4	4	233.3	116.7
42000	2000	46	3.45	0.61	5.78	4	250.3	124.7
42056	2056	46	3.54	0.63	5.96	4	256.9	127.8
42200	2200	46	3.77	0.67	6.35	4	274.1	135.9
42500	2500	46	4.25	0.76	7.19	4	310.2	152.5

 Denotes specialist sizes not available through the website  
Please contact showrooms for details

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on [www.theradiatocentre.com](http://www.theradiatocentre.com) All heat outputs are shown at an operating temperatures of 75/65/20 (Δt50°).

To recalculate to show at 90/70/20 (Δt60°) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.  
Valves are not included in the prices quoted above

#### Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

TheRadiatorCentre.com