

High thermal yields, ease of cleaning and flexibility of use are the hallmarks of the tubular, heating elements with a traditional design that furnish any living trend with style.

The production of tubular is carried out with the most modern construction technologies, through robotic production lines and highly specialized welding processes to guarantee perfect execution, absolute cleanliness and reliability over the years.

The painting is performed exclusively with the use of ecological epoxy powder paints through a process of 12 distinct phases to ensure excellent results that last over the years and an unmatched brilliance.



MATERIAL


Moulded heads in mild steel
Electro-welded mild steel tubes 25mm

Packaging

The radiator is protected by a recycled film in polyethylene and with a box in recycled carbon. User notice included.

Painting Process

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2.)

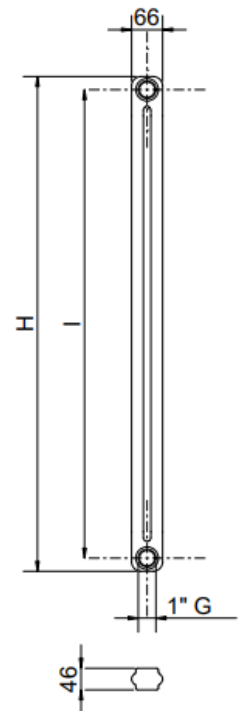

WARRANTY
5 YEARS

CERTIFICATES




Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

Code	Height	Width	Volume	Surface	Weight	n. of tubes	Output	
Codice	Altezza	Larghezza	Volume	Superficie	Peso	n° tubi	Resa Termica	
Kode	Höhe	Breite	Volumen	Oberflächlich	Gewicht	Röher N.	Leistungsfähigkeit	
Còdigo	Altura	Ancho	Volumen	Superficial	Peso	n. de tubos	Potencia tèrmica	
	H(mm)	L(mm)	dm ³	m ²	Kg		Watt Δ50°C/Δ30°C	
50207	207	46	0.7	0.09	1.24	5	39.7	20.1
50300	300	46	0.9	0.12	1.24	5	56.5	28.8
50400	400	46	1.1	0.16	1.59	5	7.4	36.8
50500	500	46	1.3	0.2	1.95	5	87.7	44.6
50556	556	46	1.41	0.22	2.14	5	96.2	48.8
50586	586	46	1.47	0.23	2.24	5	100.7	51.1
50600	600	46	1.5	0.24	2.3	5	102.7	52.1
50626	626	46	1.55	0.25	2.39	5	106.6	54
50656	656	46	1.61	0.26	2.5	5	111	56.3
50676	676	46	1.65	0.27	2.57	5	114	57.7
50750	750	46	1.8	0.29	2.83	5	124.8	63.1
50756	756	46	1.81	0.3	2.85	5	125.7	63.6
50786	786	46	1.87	0.31	2.97	5	130	65.7
50856	856	46	2.01	0.33	3.2	5	140.1	70.7
50876	876	46	2.05	0.34	3.27	5	143	72.2
50900	900	46	2.1	0.35	3.36	5	146.4	73.9
50926	926	46	2.13	0.36	3.26	5	150.1	75.6
51000	1000	46	2.3	0.39	3.71	5	160.6	80.7
51200	1200	46	2.7	0.46	4.41	5	188.8	93.9
51500	1500	46	3.3	0.58	5.47	5	230.4	113.1
51656	1656	46	3.62	0.64	6.02	5	251.9	124.4
51800	1800	46	3.91	0.69	6.53	5	271.6	134.9
51856	1856	46	2.42	0.43	4.04	5	185.5	93.6
52000	2000	46	4.31	0.77	7.23	5	299	149.6
52056	2056	46	4.42	0.79	7.45	5	306.7	153.8
52200	2200	46	4.71	0.84	7.94	5	326.4	164.6
52500	2500	46	5.31	0.95	9	5	367.4	187.4

 Denotes specialist sizes not available through the website
Please contact showrooms for details

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on www.theradiatorcentre.com All heat outputs are shown at an operating temperatures of 75/65/20 (Δt50°).
To recalculate to show at 90/70/20 (Δt60°) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.
Valves are not included in the prices quoted above

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344