

High thermal yields, ease of cleaning and flexibility of use are the hallmarks of the tubular, heating elements with a traditional design that furnish any living trend with style.

The production of tubular is carried out with the most modern construction technologies, through robotic production lines and highly specialized welding processes to guarantee perfect execution, absolute cleanliness and reliability over the years.



The painting is performed exclusively with the use of ecological epoxy powder paints through a process of 12 distinct phases to ensure excellent results that last over the years and an unmatched brilliance.

### MATERIAL


Moulded heads in mild steel  
Electro-welded mild steel tubes 25mm

### Packaging

The radiator is protected by a recycled film in polyethylene and with a box in recycled carbon. User notice included.

### Painting Process

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2.)

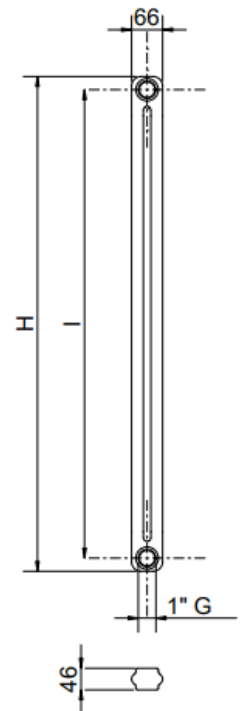

**WARRANTY**  
**5 YEARS**

### CERTIFICATES




#### Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

Code	Height	Width	Volume	Surface	Weight	n. of tubes	Output	
Codice	Altezza	Larghezza	Volume	Superficie	Peso	n° tubi	Resa Termica	
Kode	Höhe	Breite	Volumen	Oberflächlich	Gewicht	Röher N.	Leistungsfähigkeit	
Còdigo	Altura	Ancho	Volumen	Superficial	Peso	n. de tubos	Potencia térmica	
	H(mm)	L(mm)	dm <sup>3</sup>	m <sup>2</sup>	Kg		Watt Δ50°C/Δ30°C	
60207	207	46	0.8	0.11	1.07	6	48.7	24.8
60300	300	46	1.1	0.15	1.49	6	67.7	34.5
60400	400	46	1.3	0.19	1.92	6	87.3	44.6
60500	500	46	1.6	0.24	2.34	6	106.2	54.5
60556	556	46	1.7	0.27	2.58	6	116.5	60
60586	586	46	1.77	0.28	2.7	6	121.9	62.8
60600	600	46	1.8	0.29	2.76	6	124.5	64.2
60626	626	46	1.85	0.3	2.87	6	129.1	66.7
60656	656	46	1.9	0.31	2.58	6	134.5	69.5
60676	676	46	2	0.32	3.09	6	138	71.4
60750	750	46	2.2	0.35	3.4	6	150.9	78.3
60756	756	46	2.2	0.36	3.42	6	152	78.9
60786	786	46	2.25	0.37	3.56	6	157.1	81.7
60856	856	46	2.4	0.4	3.85	6	169	88.1
60876	876	46	2.5	0.41	3.93	6	172.4	90
60900	900	46	2.5	0.42	4.03	6	176.4	92.1
60926	926	46	2.56	0.43	3.92	6	180.7	94.1
61000	1000	46	1.84	0.31	2.96	6	132.7	66.4
61200	1200	46	3.2	0.56	5.3	6	224.7	113.1
61500	1500	46	4	0.69	6.57	6	270	130.8
61656	1656	46	4.36	0.76	7.23	6	292.5	142.6
61800	1800	46	4.7	0.83	7.84	6	312.7	153.2
61856	1856	46	4.84	0.85	8.11	6	320.4	157.3
62000	2000	46	5.2	0.92	8.69	6	339.8	167.8
62056	2056	46	5.29	0.94	8.95	6	347.2	171.8
62200	2200	46	5.6	1.01	9.53	6	366	182
62500	2500	46	6.4	1.14	10.8	6	4.3.4	202.9

 Denotes specialist sizes not available through the website  
Please contact showrooms for details

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on [www.theradiatorcentre.com](http://www.theradiatorcentre.com) All heat outputs are shown at an operating temperatures of 75/65/20 (Δt50°).  
To recalculate to show at 90/70/20 (Δt60°) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.  
Valves are not included in the prices quoted above

### Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344