



5 YEARS WARRANTY

PRODUCT CERTIFICATES



AWARD



MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES - STANDARD VERSION (Only for standard version):

Valves with thermostatic head

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16 x2)

Ready-to install pipe connection kit

FOR WALL-FIT VERSION THE VALVES MUST BE PURCHASED SEPARATELY.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:


Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.

For other colours see colour chart.

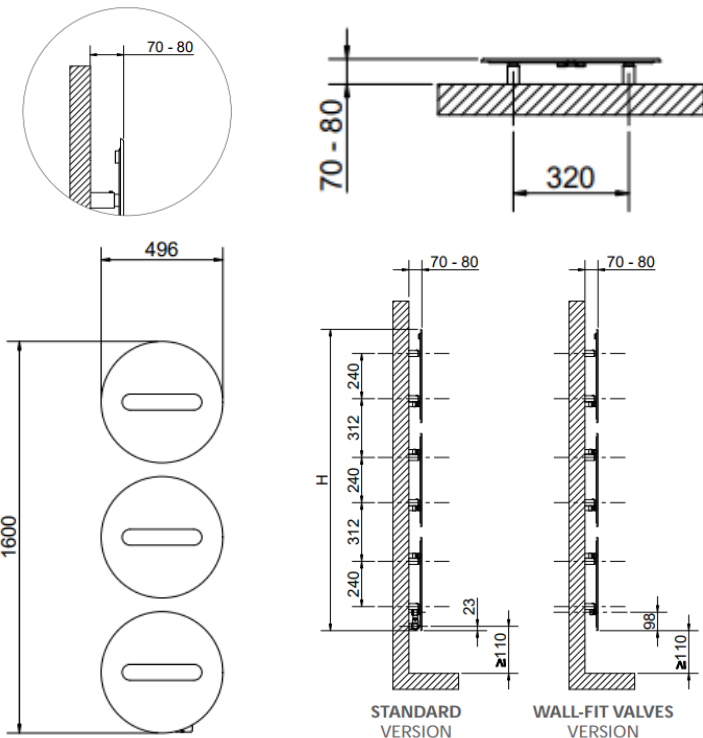


BUILT-IN CONNECTIONS

FOR SFERE TRITICO



TUTORIAL
INSTALLING
THE CONNECTION KIT

Version with PIPE CENTRES 50 mm



Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

SFERE TRITTICO COMPLETE WITH WALL-FIT HYDRAULIC CONNECTION

Art. Nr.	Diameter	Pipe Centres	A	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	D [mm]	I [mm]	[mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
STANDARD VERSION 3540806100221	496	50	24	24,3	1,2	0,9	582	316	1,195
VERSION FOR WALL-FIT VALVES 3540806100226	496	50	93	24,3	1,2	0,9	582	316	1,195

Art. Nr. are referred to white R01 colour - version.

Art. Nr. of the standard version, is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**; valves to be ordered separately.

SFERE TRITTICO WITHOUT WALL-FIT HYDRAULIC CONNECTION

Art. Nr.	Diameter	Pipe Centres	A	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	D [mm]	I [mm]	[mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
STANDARD VERSION 3540806100227	496	50	24	24,3	1,2	0,9	582	316	1,195
VERSION FOR WALL-FIT VALVES 3540806100228	496	50	93	24,3	1,2	0,9	582	316	1,195

Art. Nr. are referred to white R01 colour - version.

Art. Nr. of the standard version, is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**; valves to be ordered separately.

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on www.theradiatorcentre.com All heat outputs are shown at an operating temperatures of 75/65/20 ($\Delta t 50^{\circ}$).

To recalculate to show at 90/70/20 ($\Delta t 60^{\circ}$) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.
Valves are not included in the prices quoted above