


You can control up to four receivers with just with one chronothermostat.


Avec un seul thermostat radio fréquence, il est possibile de contrôler jusqu'à 4 radiateurs.

Mit nur einem Funkthermostat können bis zu vier Heizkörper angesteuert werden.

Con un único termostato de radiofrecuencia es posible controlar hasta 4 radiadores.

The distance between the receiver and the chronothermostat must not exceed 10 m. Distance maximale entre le récepteur et thermostat radio fréquence est de 10 mètres. Der Abstand zwischen dem Funkthermostat und dem Empfänger darf maximal 10 Meter betragen. La distancia entre el receptor y el termostato de radiofrecuencia no debe ser superior a los 10 metros

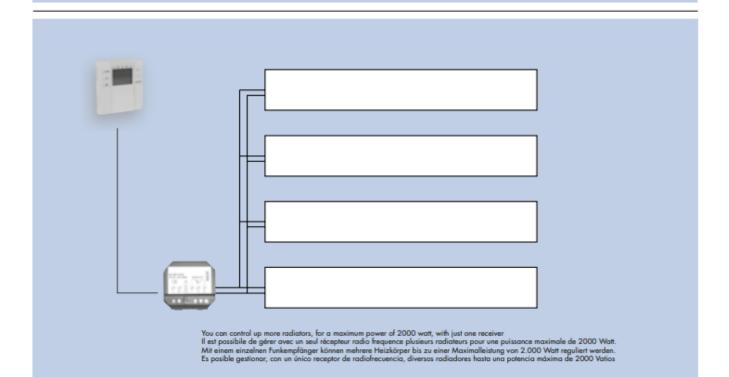

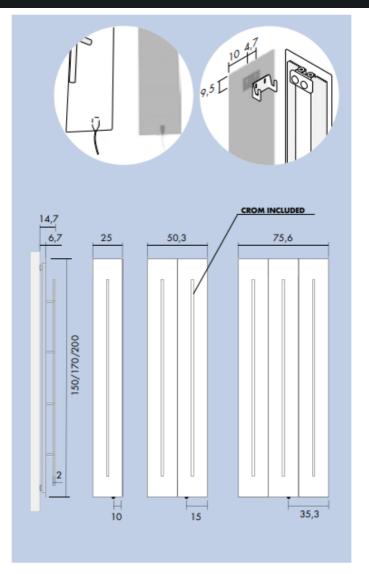

H cm	L cm	art*	watt
150.0	25.0	EC TSV150001_	250
150.0	50.3	EC TSV150002_	500
150.0	75.6	EC TSV150003_	700
170.0	25.0	EC TSV170001_	300
170.0	50.3	EC TSV170002_	600
170.0	75.6	EC TSV170003_	700
200.0	25.0	EC TSV200001_	400
200.0	50.3	EC TSV200002_	700
200.0	75.6	EC TSV200003	900

watt	
200	
500	
700	
250	
600	
700	
300	
700	
900	

**CRSM**Brushed chrome / Chrome brossé /
Gebürstet Chrome / Cromo cepillado

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on www.theradiatocentre.com All heat outputs are shown at an operating temperatures of 75/65/20 ( $\Delta$ t50°). To recalculate to show at 90/70/20 ( $\Delta$ t60°) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.

Valves are not included in the prices quoted above