

BEAMS (BEAMS)



COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in collection Pure Grey
- Extensive colour chart

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect X100

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection)
- ✓ Two-point connection for two-pipe system (standard)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**

PROTECT X100*

Ref. nr. 11FH55064



* 1 bottle (1 litre) per 100 litres installation water

BEAMS

Functionality at its best

Architectural space was the inspiration for this innovative, multiple design awards acclaimed radiator concept. Three beam-shaped volumes form a robust whole, nicely balanced with the geometric architecture in the living space. The geometric accessories provide you the option of making the desired accents yourself. Two water channels per element guarantee excellent efficiency, with optimal energy savings as a bonus.

RECOMMENDED CONNECTION (0066)



ref. nr. 1182 103 0000 0099

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



DISCONTINUED ITEM
towel rail (aluminium)




rectangular towel rail (S600)




HOW TO ORDER BEAMS

Delivery time 15 - 30 working days
(transport duration not included)

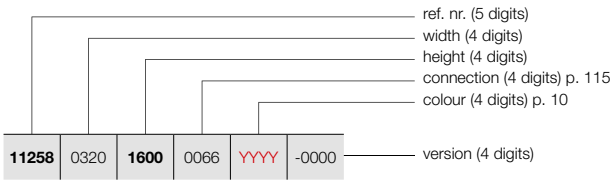

HOW TO ORDER STOCK RADIATOR BEAMS

Delivery time 5 working days
(transport duration not included)




BEAMS (BEAMS)



REFERENCE CODE CUSTOM MADE BEAMS						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Ø50K)	55/45/20 (Watt) (Ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. BEAMS : 11258														
11258	0320	1600	0066	YYYY	-0000	2	320	1600	1127	583	1,29	15,50	1,00	-
		1800				2	320	1800	1237	643	1,28	17,28	1,08	-
		2000				2	320	2000	1348	701	1,28	19,05	1,15	-
		2200				2	320	2200	1459	755	1,29	20,90	1,30	-
11258	0490	1600	0066	YYYY	-0000	3	490	1600	1658	867	1,27	23,20	1,53	-
		1800				3	490	1800	1821	947	1,28	25,88	1,64	-
		2000				3	490	2000	1983	1026	1,29	28,55	1,75	-
		2200				3	490	2200	2147	1111	1,29	31,25	2,00	-
11258	0660	1600	0066	YYYY	-0000	4	660	1600	2172	1147	1,25	30,90	2,05	-
		1800				4	660	1800	2385	1247	1,27	34,48	2,20	-
		2000				4	660	2000	2598	1337	1,30	38,05	2,35	-
		2200				4	660	2200	2812	1455	1,29	41,60	2,70	-

In conformity with EN442-1: 2014: radiators and convectors

BEAMS (BEAMS MONO)

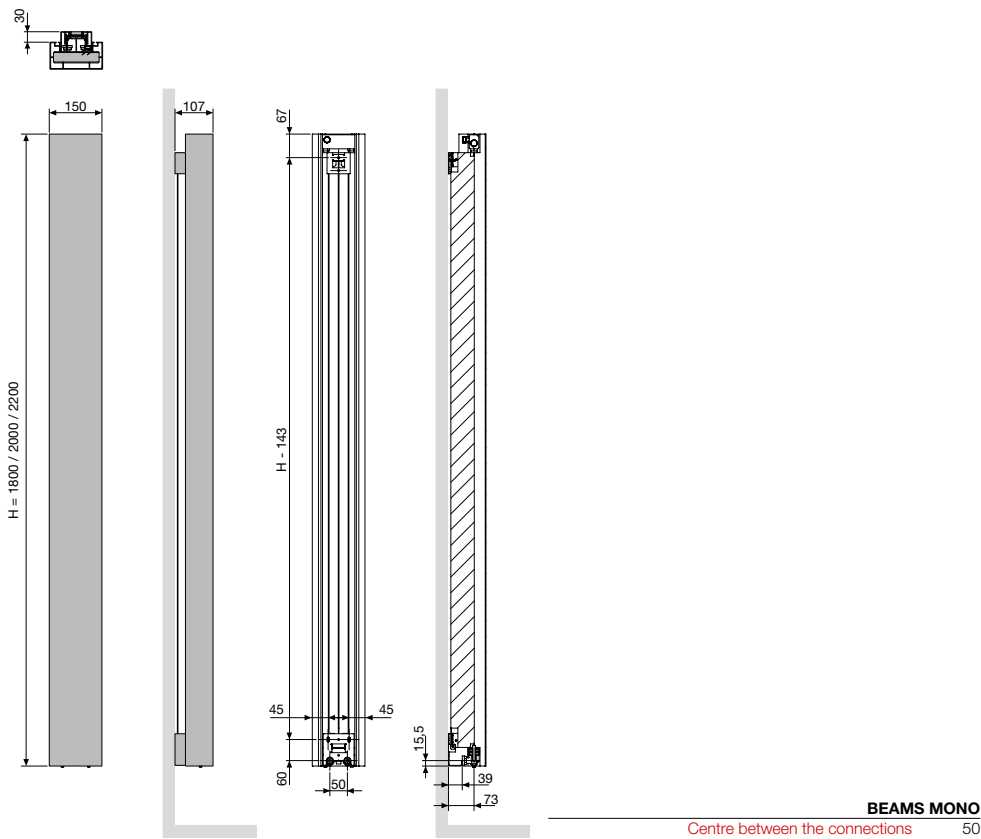

BEAMS (BEAMS)

