

## BEAMS (BEAMS MONO)



### COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in collection Pure Grey
- Extensive colour chart

### SPECIAL

- Composed out of 1 vertical aluminium profile (width 150 mm)
- Protection against internal corrosion: protecting product Protect X100

### BRACKETS

- Wall brackets standard (discretely eliminated)

### TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C
- **Integrated connection (valve set) (lockable) (the central heating pipes should be connected directly to this)**

### ELECTRICAL

- ✓ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS

- 

### CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (built-in thermostat box
- ✗ Integrated valve
- Connections: 3/4" Euro cones
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**
- **Attention: must be used in combination with the built-in thermostat box.**

### PROTECT X100\*

Ref. nr. 11FH55064

\* 1 bottle (1 litre) per 100 litres installation water

## BEAMS MONO

### Architectural freedom with aluminium

Vasco have a tradition for technical excellence, enabling them to continually develop new and exciting products. These designer radiators are characterised by their vertical aluminium sections (150 mm wide), and are the most minimalistic design ever developed by Vasco. The design completely conceals the collector, making the valve set invisible and also integrates the suspensions.

### RECOMMENDED CONNECTION (0066)



### RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



short towel rail (S600)

### BUILT-IN THERMOSTAT BOX




ref. nr. 1182 306 0000 0099

### INTEGRATED CONNECTION (VALVE SET) (SQUARE)




HOW TO ORDER BEAMS MONO

Delivery time 15 - 30 working days  
(transport duration not included)

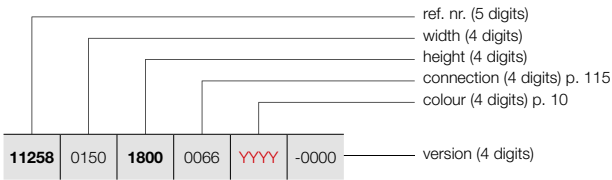

HOW TO ORDER STOCK RADIATOR BEAMS MONO

Delivery time 5 working days  
(transport duration not included)



REFERENCE CODE CUSTOM MADE BEAMS MONO						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ø50K)	55/45/20 (Watt) (ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. BEAMS MONO : 11258														
11258	0150	1800	0066	YYYY	-0000	-	150	1800	671	351	1,27	8,60	0,47	-
		-				150	2000	734	384	1,27	9,55	0,52	-	
		-				150	2200	795	413	1,28	10,50	0,57	-	

In conformity with EN442-1: 2014: radiators and convectors

BEAMS (BEAMS MONO)



BEAMS MONO

BEAMS (BEAMS MONO)

