


# The Radiator Centre

## Chelsea Handmade Towel Rail Fixing Instructions

We are able to manufacture our handmade brass towel rails in any size or shape. With a large number of products and finishes available as standard, we are confident we are able to offer a solution to your heating needs.

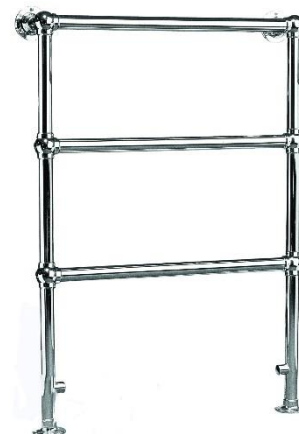

**PLEASE UNPACK YOUR DELIVERY CAREFULLY AND INSPECT THE RADIATOR AND CONTENTS – ANY DAMAGES OR SHORTAGES MUST BE NOTIFIED TO YOUR SUPPLIER WITHIN 3 DAYS OF DELIVERY OF YOUR GOODS.**

Stainless Steel and Brass Towel Rails can be used on an Open Vented System

### **TECHNICAL SPECIFICATIONS FOR YOUR ICKBURGH TOWEL RAIL**


Wall to Pipe Centre= 100mm	Wall to Front Face= 142mm	Width -157mm=Tapping Centre
----------------------------	---------------------------	-----------------------------

Standard  
Connections 1/2"

Other connections  
are available on  
request.

**F** = Flow  
**R** = Return  
**E** = Element  
Position

Tube Diameter = 31.8mm

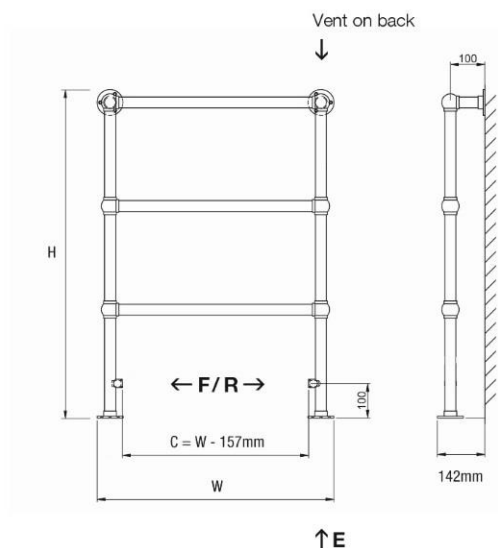

Materials	Brass
Connections	½ Flow and return
Test pressure	7 Bar
Testing authority	EN442
Max operation pressure	4 Bar
Max working temperature	95c

**These can be cleaned using a soft damp cloth with a non-abrasive cleaning product**

## **INSTALLATION AND FIXING**

### **FIXINGS**

The towel rail is supplied with fixings, consisting of:  
12 x Fixing Screws



**Step 1:** Place the towel rail in the desired location and mark the position of the back plate fixing holes.

**Step 2:** Ensuring it is safe to do so, using a suitable drill bit, drill the holes.

**Step 3:** The towel rail can now be fixed to the wall/floor using suitable plugs + screws provided.

**Step 4:** The towel rail can now be connected to the central heating system and bled via the bleed valve



## **ADDITIONAL INFORMATION**

If you are fixing your radiator to a stud wall, you should place the radiator in the desired position and hold up the back plate in position and mark through the fixing holes to a secure position.

**Installation of this towel rail should only be carried out by a qualified engineer in accordance with local regulations. Failure to do so may invalidate your warranty.**