

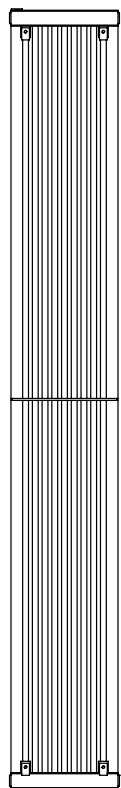
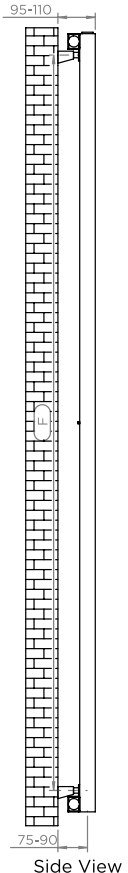
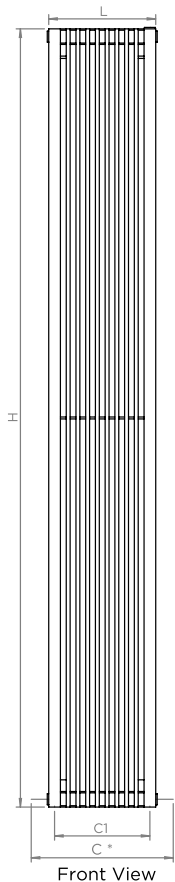


ALL MEASUREMENTS ARE IN MILLIMETRES

MANUFACTURED FROM STAINLESS STEEL

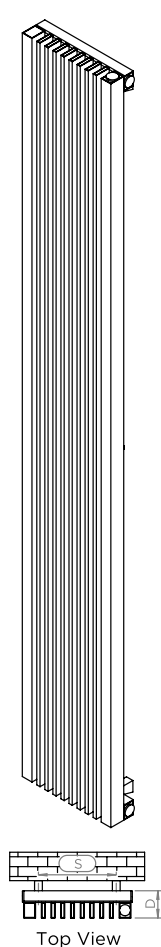

#### Installation Accessories:

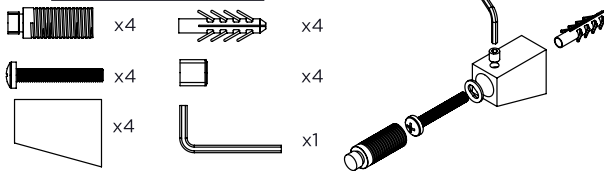


C \*: Available for minimum ten profiles

Manufacturing Tolerance : - 5 mm

PRODUCT CODE	Height	Length	Depth	Pipe Centres		Bracket Centres	
	H mm	L mm	D mm	C-C1 mm	F mm	S mm	
STR 616	600	425	70	515-395	490	350	
STR630	600	525	70	615-495	490	450	
STR624	600	625	70	715-595	490	550	
STR636	600	925	70	1015-895	490	850	
STR642	600	1075	70	1165-1045	490	1000	
STR 648	600	1225	70	1315-1195	490	1150	
STR654	600	1375	70	1465-1345	490	1300	
STR1010	1000	275	70	365-245	890	200	
STR1016	1000	425	70	515-395	890	350	
STR1020	1000	525	70	615-495	890	450	
STR1024	1000	625	70	715-595	890	550	
STR1030	1000	775	70	865-745	890	700	
STR1508	1500	225	70	195	1390	150	
STR1510	1500	275	70	365-245	1390	200	
STR1512	1500	325	70	415-295	1390	250	
STR1516	1500	425	70	515-395	1390	350	
STR1520	1500	525	70	615-495	1390	450	
STR1808	1800	225	70	195	1690	150	
STR1810	1800	275	70	365-245	1690	200	
STR1812	1800	325	70	415-295	1690	250	
STR1816	1800	425	70	515-395	1690	350	
STR1820	1800	525	70	615-495	1690	450	
STR2008	2000	225	70	195	1890	150	
STR2010	2000	275	70	365-245	1890	200	
STR2012	2000	325	70	415-295	1890	250	
STR2016	2000	425	70	515-395	1890	350	
STR2020	2000	525	70	615-495	1890	450	


FR-71-Rev.00

#### Plumbing Position: Horizontal



When mounting horizontally, please knock through the centre hole of the diverter using a suitable rod. Please remove the disk if it comes loose and can be removed from a tapping

#### Plumbing Position: Vertical



When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

Vertical / Horizontal mount  
All Dimensions are in mm  
Max.Working Pressure: 10 Bar  
Max.Working Temperature: 95° C  
Inlet / Outlet: 1/2" BSP  
Fuel : E/H/D