

KATIA VX WIDE

 WARRANTY 5 YEARS



Color: H27 Rosso vivo

FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- 15x20 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

AVAILABLE ACCESSORIES







Kristal valve Total Color,
angled with thermostatic
option, colored



Kit 2 colored hooks



Thermostatic head
Kristal TC
fully colored

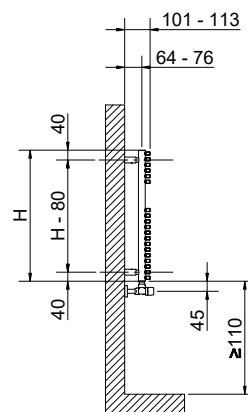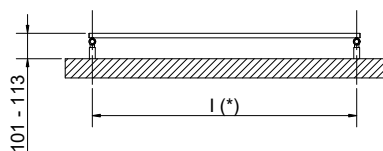

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

KATIA VX WIDE

Height	Width	Pipe Centres	Art. nr.	Dry Weight	Surface	Water content	Thermal output			
							Δt 50°C	Δt 30°C	Exp.	Dual energy kit
[mm]	L [mm]	l [mm]	R01 White	[kg]	[m ²]	[lt]	[Watt]	[Watt]	n	[Watt]
405	1200	1170	3551826101201	10,9	1,06	3,3	621	336	1,2029	400
	1400	1370	3551826101203	12,0	1,25	3,8	740	404	1,1852	400
580	1200	1170	3551826101202	11,3	1,21	3,6	960	532	1,1572	700
	1400	1370	3551826101204	13,0	1,29	4,1	1122	603	1,2170	700

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: **desired output = output at ΔT 50 x (Desired Δt /50)*n**