

TYPES

- Single (NS1L1) and double (NS2L1)

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Extensive colour chart see p. 10

SPECIAL

- The Niva Soft Vertical is available with a lacquered front plate (this means steel plate radiator + lacquered front plate).
- With a flat front plate and rounded sides as a modern-day touch
- Thermostatic head at doorknob height in option (not for NS1L1) (see p. 316).

BRACKETS

- Wall brackets in the colour RAL 7016 (anthracite grey) standard. Also in option available in the colour S600 (see p. 148).

TECHNICAL

- Electrically welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator



TECHNICAL DRAWINGS

•

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 314)
- ✓ Two-point connection for two-pipe system (standard)
- ✓ Integrated valve **(extra charge)** (not for NS1L1)
- Connections: ½" (inner thread)

RECOMMENDED CONNECTION NS1L1/NS2L1 (1188)




RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail (aluminium)
NS1L1 ref. nr.

NS2L1 ref. nr.

OPTION: CONNECTION NS2L1 (0098) INTEGRATED VALVE (SUPPLEMENT)



ref. nr. 1182 301 0000 0099

Fittings, see p. 329

Other connection methods, see p. 151



NIVA SOFT VERTICAL

Pure class in all its creativity

The Niva in all its compact, stylish simplicity, but designed with softly rounded edges. A designer radiator that perfectly comes into its own with both a minimalist interior and a contemporary retro surround. Available with a thermostat knob at doorknob height.



NIVA SOFT VERTICAL (NS1L1, NS2L1)




NS1L1



NS2L1


HOW TO ORDER NIVA SOFT

Delivery time 15 - 30 working days
(transport duration not included)

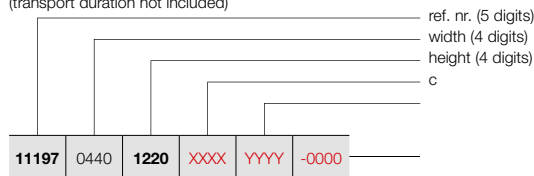

HOW TO ORDER STOCK RADIATOR NIVA SOFT


Delivery time 5 working days
(transport duration not included)



REFERENCE CODE CUSTOM MADE NIVA SOFT VERTICAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. NIVA SOFT VERTICAL NS1L1 : 11197														
11197	0440	1220	XXXX	YYYY	-0000	-	440	1220	645	337	1,27	18,10	2,55	-
		-				440	1820	934	486	1,28	27,35	3,70	-	
		-				440	2020	1023	532	1,28	30,20	4,00	-	
		-				440	2220	1070	559	1,27	33,20	4,50	-	
11197	0540	1220	XXXX	YYYY	-0000	-	540	1220	815	424	1,28	21,97	3,32	-
		-				540	1820	1128	587	1,28	33,67	4,61	-	
		-				540	2020	1257	654	1,28	37,12	5,05	-	
		-				540	2220	1310	681	1,28	40,88	5,57	-	
11197	0640	1220	XXXX	YYYY	-0000	-	640	1220	985	510	1,29	25,83	3,85	-
		-				640	1820	1322	687	1,28	39,98	5,52	-	
		-				640	2020	1490	775	1,28	44,03	6,10	-	
		-				640	2220	1550	806	1,28	48,57	6,63	-	
11197	0740	1820	XXXX	YYYY	-0000	-	740	1820	1515	784	1,29	46,30	6,43	-
		-				740	2020	1724	897	1,28	50,95	7,15	-	
		-				740	2220	1790	926	1,29	56,25	7,70	-	
REF. NR. NIVA SOFT VERTICAL NS2L1 : 11198														
11198	0440	1220	XXXX	YYYY	-0000	-	440	1220	988	506	1,31	28,40	4,90	-
		-				440	1820	1330	681	1,31	42,23	7,28	-	
		-				440	2020	1438	736	1,31	46,75	8,00	-	
		-				440	2220	1543	823	1,23	51,40	8,90	-	
11198	0540	1220	XXXX	YYYY	-0000	-	540	1220	1213	621	1,31	36,83	6,48	-
		-				540	1820	1633	836	1,31	51,68	9,07	-	
		-				540	2020	1764	903	1,31	57,23	10,00	-	
		-				540	2220	1893	995	1,26	62,73	11,00	-	
11198	0640	1220	XXXX	YYYY	-0000	-	640	1220	1437	732	1,32	38,17	7,02	-
		-				640	1820	1935	991	1,31	61,14	10,86	-	
		-				640	2020	2091	1071	1,31	67,72	12,00	-	
		-				640	2220	2243	1160	1,29	74,07	13,10	-	
11198	0740	1820	XXXX	YYYY	-0000	-	740	1820	2237	1146	1,31	70,60	12,65	-
		-				740	2020	2417	1238	1,31	78,20	14,00	-	
		-				740	2220	2594	1322	1,32	85,40	15,20	-	


In conformity with EN442-1: 2014: radiators and convectors

NIVA SOFT VERTICAL (NS1L1)

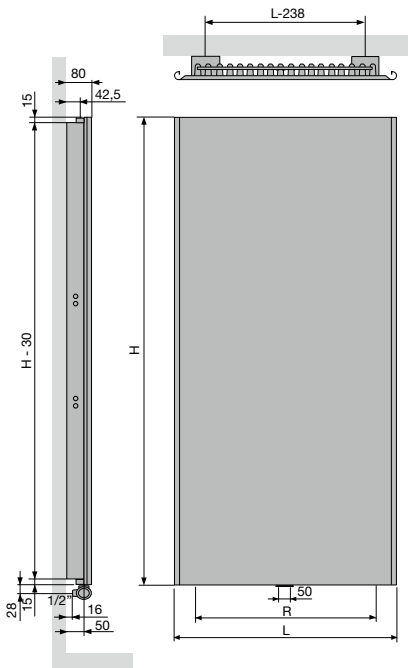

NS1L1				
Width (L)	440	540	640	740
Centre between the connections at the bottom (R)	200	300	400	500
Centre between the brackets	L-238	H-241		

NIVA SOFT VERTICAL (NS2L1)

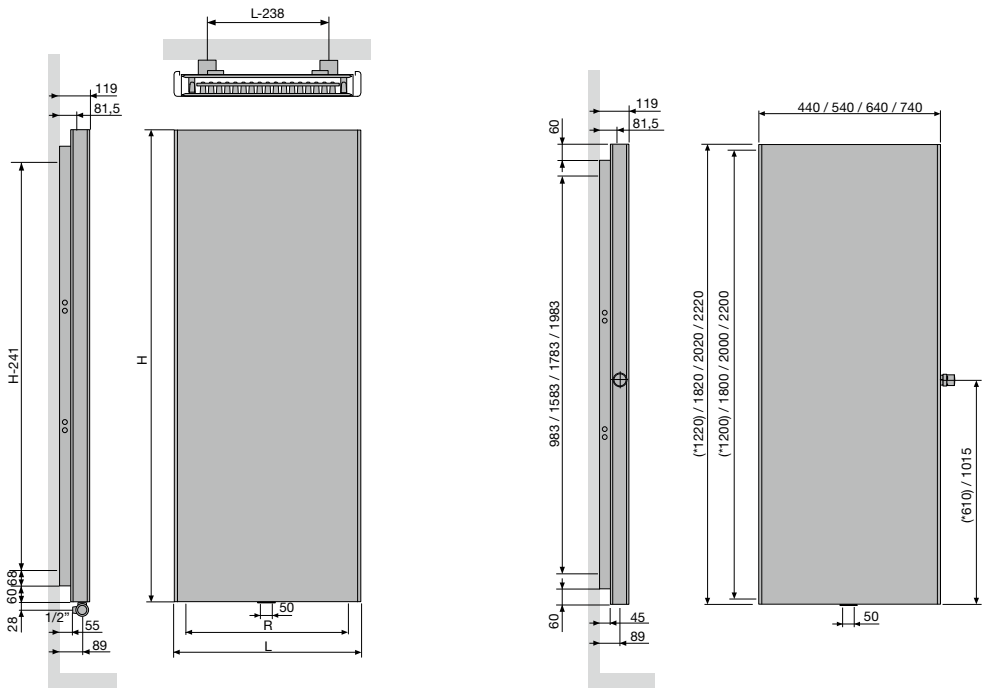

NS2L1				
Width (L)	440	540	640	740
Centre between the connections at the bottom (R)	338	438	538	638
Centre between the brackets	L-238	H-241		