

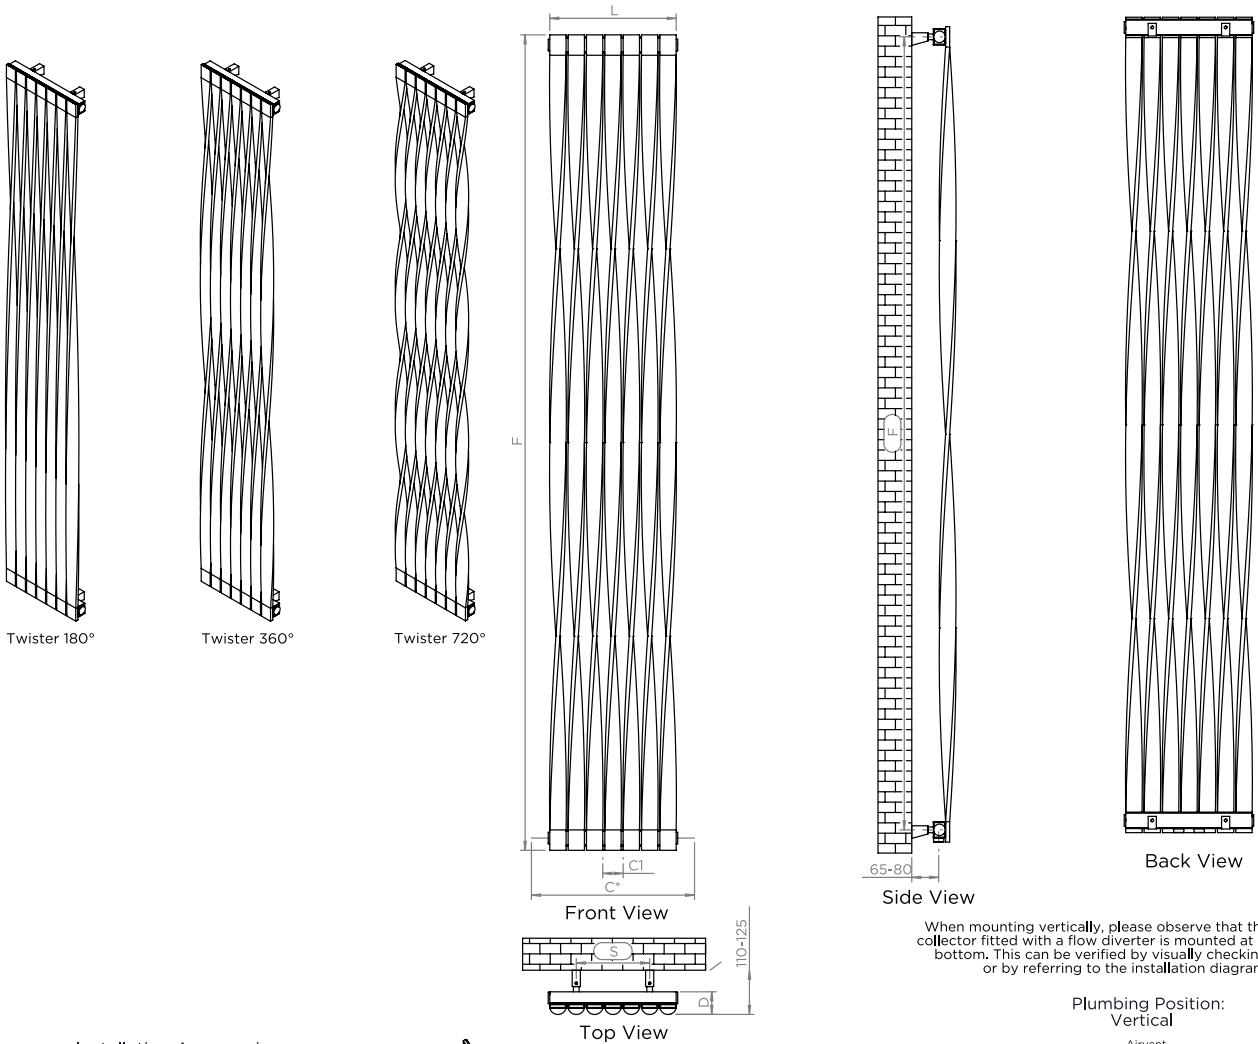


ALL MEASUREMENTS ARE IN MILLIMETRES

MANUFACTURED FROM STAINLESS STEEL




Installation Accessories:



Plumbing Position: Vertical

Vertical mount  
All Dimensions are in mm  
Max. Working Pressure: 8 Bar  
Max. Working Temperature: 95° C  
Inlet / Outlet : 1/2" BSP  
Fuel : E/H/D



C\* : Only available for minimum seven profiles  
Manufacturing Tolerance : - 5 mm

PRODUCT CODE	Height	Length	Depth	Pipe Centres	Bracket Centres	
	H	L	D	Cl-C	F	S
	mm	mm	mm	mm	mm	mm
TW1505_180	1500	220	55	50	1445	90
TW1505_360	1500	220	55	50	1445	90
TW1507_180	1500	310	55	50-400	1445	180
TW1507_360	1500	310	55	50-400	1445	180
TW1509_180	1500	400	55	50-490	1445	270
TW1509_360	1500	400	55	50-490	1445	270
TW1805_180	1800	220	55	50	1745	90
TW1805_360	1800	220	55	50	1745	90
TW1807_180	1800	310	55	50-400	1745	180
TW1807_360	1800	310	55	50-400	1745	180
TW1809_180	1800	400	55	50-490	1745	270
TW1809_360	1800	400	55	50-490	1745	270
TW2005_180	2000	220	55	50	1945	90
TW2005_360	2000	220	55	50	1945	90
TW2005_270	2000	220	55	50	1940	90
TW2007_180	2000	310	55	50-400	1945	180
TW2007_360	2000	310	55	50-400	1945	180
TW2007_270	2000	310	55	50-400	1940	180
TW2009_180	2000	400	55	50-490	1945	270
TW2009_360	2000	400	55	50-490	1945	270
TW2009_270	2000	400	55	50-490	1940	270