

VINTAGE (VINTAGE 50)



TYPES

- Vintage 50: distance between the columns 50 mm
- 4 depths (D110, D160, D220, D250)

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Available in transparent coating (colour code 9990)
- **Attention: do not equip a radiator in transparent coating in damp rooms!**
- Extensive colour chart

SPECIAL

- Wall- or floor mounting

BRACKETS

- Standard wall brackets and feet, 1/2" plug, 1/2" air vent
- Brackets in the colour of the radiator (number depends on the length of the radiator)
- The feet and brackets of radiators in transparent coating are lacquered in the colour N507.

TECHNICAL

- KTL priming coat, epoxy-polyester powder coating
- Standard operating pressure: 5 bar
- Maximum operating temperature: 110°C

TECHNICAL DRAWINGS

- See p. 310

CONNECTION


- 4x 1/2" (23, 67, 26, 37)
- Air vent in connection 3 or 6
- Connections: 1/2" (inner thread)
- Connection 27, 72:

VINTAGE

The past has made a complete comeback

Back to the 'primal radiator'. Very popular because of its imaginative, authentic look. Offered as standard in white, but also available in a transparent coating for an even more pronounced vintage look. Vintage guarantees an extremely high heat output. Ideal for the heating of large, high rooms, also in combination with low-energy technologies. A designer radiator like no other that comes into its own in a retro interior and likes to be placed in front of a window.

RECOMMENDED CONNECTION (2367)




HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

							ref. nr. (5 digits)
							width (4 digits)
							height (4 digits)
							connection (4 digits) p. 309
							colour (4 digits) p. 10
11290	0178	0600	2367	YYYY	-0000		version (4 digits)
							-0000 = with wall brackets
							-0001 = with feet

VINTAGE (VINTAGE 50 / D110)




VINTAGE 50 / D110

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D110 : 11290														
11290	0178	0600	2367	YYYY	-0000	3	178	600	165	87	1,25	4,17	2,49	-
		1000				3	178	1000	252	131	1,28	6,57	3,39	-
11290	0228	0600	2367	YYYY	-0000	4	228	600	220	116	1,25	5,56	3,32	-
		1000				4	228	1000	336	175	1,28	8,76	4,52	-
11290	0278	0600	2367	YYYY	-0000	5	278	600	275	145	1,25	6,95	4,15	-
		1000				5	278	1000	420	218	1,28	10,95	5,65	-
11290	0328	0600	2367	YYYY	-0000	6	328	600	330	174	1,25	8,34	4,98	-
		1000				6	328	1000	504	262	1,28	13,14	6,78	-
11290	0378	0600	2367	YYYY	-0000	7	378	600	385	203	1,25	9,73	5,81	-
		1000				7	378	1000	588	306	1,28	15,33	7,91	-
11290	0428	0600	2367	YYYY	-0000	8	428	600	440	232	1,25	11,12	6,64	-
		1000				8	428	1000	672	349	1,28	17,52	9,04	-
11290	0478	0600	2367	YYYY	-0000	9	478	600	495	261	1,25	12,51	7,47	-
		1000				9	478	1000	756	393	1,28	19,71	10,17	-
11290	0528	0600	2367	YYYY	-0000	10	528	600	550	290	1,25	13,90	8,30	-
		1000				10	528	1000	840	437	1,28	21,90	11,30	-
11290	0578	0600	2367	YYYY	-0000	11	578	600	605	319	1,25	15,29	9,13	-
		1000				11	578	1000	924	481	1,28	24,09	12,43	-
11290	0628	0600	2367	YYYY	-0000	12	628	600	660	349	1,25	16,68	9,96	-
		1000				12	628	1000	1008	524	1,28	26,28	13,56	-
11290	0678	0600	2367	YYYY	-0000	13	678	600	715	378	1,25	18,07	10,79	-
		1000				13	678	1000	1092	568	1,28	28,47	14,69	-
11290	0728	0600	2367	YYYY	-0000	14	728	600	770	407	1,25	19,46	11,62	-
		1000				14	728	1000	1176	612	1,28	30,66	15,82	-
11290	0778	0600	2367	YYYY	-0000	15	778	600	825	436	1,25	20,85	12,45	-
		1000				15	778	1000	1260	655	1,28	32,85	16,95	-
11290	0828	0600	2367	YYYY	-0000	16	828	600	880	465	1,25	22,24	13,28	-
		1000				16	828	1000	1344	699	1,28	35,04	18,08	-
11290	0878	0600	2367	YYYY	-0000	17	878	600	935	494	1,25	23,63	14,11	-
		1000				17	878	1000	1428	743	1,28	37,23	19,21	-
11290	0928	0600	2367	YYYY	-0000	18	928	600	990	523	1,25	25,02	14,94	-
		1000				18	928	1000	1512	786	1,28	39,42	20,34	-
11290	0978	0600	2367	YYYY	-0000	19	978	600	1045	552	1,25	26,41	15,77	-
		1000				19	978	1000	1596	830	1,28	41,61	21,47	-

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D110)



VINTAGE 50 / D110

HOW TO ORDER VINTAGE 50


Delivery time 15 - 30 working days
(transport duration not included)

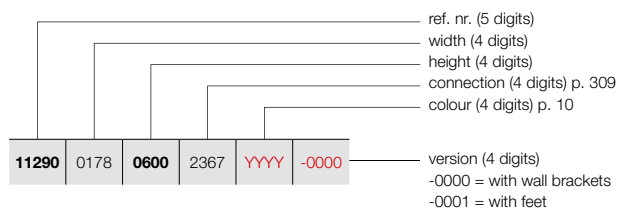


REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D110 : 11290														
11290	1028	0600	2367	YYYY	-0000	20	1028	600	1100	581	1,25	27,80	16,60	-
		1000				20	1028	1000	1680	874	1,28	43,80	22,60	-
11290	1078	0600	2367	YYYY	-0000	21	1078	600	1155	610	1,25	29,19	17,43	-
		1000				21	1078	1000	1764	917	1,28	45,99	23,73	-
11290	1128	0600	2367	YYYY	-0000	22	1128	600	1210	639	1,25	30,58	18,26	-
		1000				22	1128	1000	1848	961	1,28	48,18	24,86	-
11290	1178	0600	2367	YYYY	-0000	23	1178	600	1265	668	1,25	31,97	19,09	-
		1000				23	1178	1000	1932	1005	1,28	50,37	25,99	-
11290	1228	0600	2367	YYYY	-0000	24	1228	600	1320	697	1,25	33,36	19,92	-
		1000				24	1228	1000	2016	1048	1,28	52,56	27,12	-
11290	1278	0600	2367	YYYY	-0000	25	1278	600	1375	726	1,25	34,75	20,75	-
		1000				25	1278	1000	2100	1092	1,28	54,75	28,25	-
11290	1328	0600	2367	YYYY	-0000	26	1328	600	1430	755	1,25	36,14	21,58	-
		1000				26	1328	1000	2184	1136	1,28	56,94	29,38	-
11290	1378	0600	2367	YYYY	-0000	27	1378	600	1485	784	1,25	37,53	22,41	-
		1000				27	1378	1000	2268	1179	1,28	59,13	30,51	-
11290	1428	0600	2367	YYYY	-0000	28	1428	600	1540	813	1,25	38,92	23,24	-
		1000				28	1428	1000	2352	1223	1,28	61,32	31,64	-
11290	1478	0600	2367	YYYY	-0000	29	1478	600	1595	842	1,25	40,31	24,07	-
		1000				29	1478	1000	2436	1267	1,28	63,51	32,77	-
11290	1528	0600	2367	YYYY	-0000	30	1528	600	1650	871	1,25	41,70	24,90	-
		1000				30	1528	1000	2520	1310	1,28	65,70	33,90	-
11290	1578	0600	2367	YYYY	-0000	31	1578	600	1705	900	1,25	43,09	25,73	-
		1000				31	1578	1000	2604	1354	1,28	67,89	35,03	-
11290	1628	0600	2367	YYYY	-0000	32	1628	600	1760	929	1,25	44,48	26,56	-
		1000				32	1628	1000	2688	1398	1,28	70,08	36,16	-
11290	1678	0600	2367	YYYY	-0000	33	1678	600	1815	958	1,25	45,87	27,39	-
		1000				33	1678	1000	2772	1442	1,28	72,27	37,29	-
11290	1728	0600	2367	YYYY	-0000	34	1728	600	1870	987	1,25	47,26	28,22	-
		1000				34	1728	1000	2856	1485	1,28	74,46	38,42	-
11290	1778	0600	2367	YYYY	-0000	35	1778	600	1925	1017	1,25	48,65	29,05	-
		1000				35	1778	1000	2940	1529	1,28	76,65	39,55	-
11290	1828	0600	2367	YYYY	-0000	36	1828	600	1980	1046	1,25	50,04	29,88	-
		1000				36	1828	1000	3024	1573	1,28	78,84	40,68	-
11290	1878	0600	2367	YYYY	-0000	37	1878	600	2035	1075	1,25	51,43	30,71	-
		1000				37	1878	1000	3108	1616	1,28	81,03	41,81	-

HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

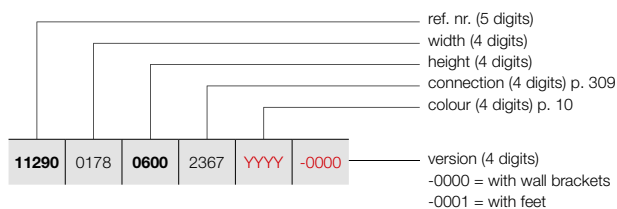

VINTAGE (VINTAGE 50 / D110)




VINTAGE 50 / D110

PRODUCT GROUP: COLUMN

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA									
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	
REF. NR. VINTAGE 50/D110 : 11290															
11290	1928	0600	2367	YYYY	-0000	38	1928	600	2090	1104	1,25	52,82	31,54	-	
		1000				38	1928	1000	3192	1660	1,28	83,22	42,94	-	
11290	1978	0600	2367	YYYY	-0000	39	1978	600	2145	1133	1,25	54,21	32,37	-	
		1000				39	1978	1000	3276	1704	1,28	85,41	44,07	-	
11290	2028	0600	2367	YYYY	-0000	40	2028	600	2200	1162	1,25	55,60	33,20	-	
		1000				40	2028	1000	3360	1747	1,28	87,60	45,20	-	
11290	2078	0600	2367	YYYY	-0000	41	2078	600	2255	1191	1,25	56,99	34,03	-	
		1000				41	2078	1000	3444	1791	1,28	89,79	46,33	-	
11290	2128	0600	2367	YYYY	-0000	42	2128	600	2310	1220	1,25	58,38	34,86	-	
		1000				42	2128	1000	3528	1835	1,28	91,98	47,46	-	
11290	2178	0600	2367	YYYY	-0000	43	2178	600	2365	1249	1,25	59,77	35,69	-	
		1000				43	2178	1000	3612	1878	1,28	94,17	48,59	-	
11290	2228	0600	2367	YYYY	-0000	44	2228	600	2420	1278	1,25	61,16	36,52	-	
		1000				44	2228	1000	3696	1922	1,28	96,36	49,72	-	
11290	2278	0600	2367	YYYY	-0000	45	2278	600	2475	1307	1,25	62,55	37,35	-	
		1000				45	2278	1000	3780	1966	1,28	98,55	50,85	-	
11290	2328	0600	2367	YYYY	-0000	46	2328	600	2530	1336	1,25	63,94	38,18	-	
11290	2378	0600	2367	YYYY	-0000	47	2378	600	2585	1365	1,25	65,33	39,01	-	
11290	2428	0600	2367	YYYY	-0000	48	2428	600	2640	1394	1,25	66,72	39,84	-	
11290	2478	0600	2367	YYYY	-0000	49	2478	600	2695	1423	1,25	68,11	40,67	-	
11290	2528	0600	2367	YYYY	-0000	50	2528	600	2750	1452	1,25	69,50	41,50	-	
11290	2578	0600	2367	YYYY	-0000	51	2578	600	2805	1481	1,25	70,89	42,33	-	
11290	2628	0600	2367	YYYY	-0000	52	2628	600	2860	1510	1,25	72,28	43,16	-	
11290	2678	0600	2367	YYYY	-0000	53	2678	600	2915	1539	1,25	73,67	43,99	-	
11290	2728	0600	2367	YYYY	-0000	54	2728	600	2970	1568	1,25	75,06	44,82	-	
11290	2778	0600	2367	YYYY	-0000	55	2778	600	3025	1597	1,25	76,45	45,65	-	
11290	2828	0600	2367	YYYY	-0000	56	2828	600	3080	1626	1,25	77,84	46,48	-	
11290	2878	0600	2367	YYYY	-0000	57	2878	600	3135	1655	1,25	79,23	47,31	-	
11290	2928	0600	2367	YYYY	-0000	58	2928	600	3190	1685	1,25	80,62	48,14	-	
11290	2978	0600	2367	YYYY	-0000	59	2978	600	3245	1714	1,25	82,01	48,97	-	
11290	3028	0600	2367	YYYY	-0000	60	3028	600	3300	1743	1,25	83,40	49,80	-	

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D160)



VINTAGE 50 / D160

HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

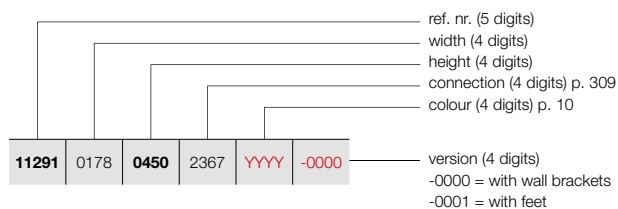

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D160 : 11291														
11291	0178	0450 0600 1000	2367	YYYY	-0000	3	178	450	174	92	1,24	4,47	2,82	-
						3	178	600	219	115	1,26	6,00	3,42	-
						3	178	1000	333	172	1,29	9,63	4,89	-
11291	0228	0450 0600 1000	2367	YYYY	-0000	4	228	450	232	123	1,24	5,96	3,76	-
						4	228	600	292	153	1,26	8,00	4,56	-
						4	228	1000	444	230	1,29	12,84	6,52	-
11291	0278	0450 0600 1000	2367	YYYY	-0000	5	278	450	290	154	1,24	7,45	4,70	-
						5	278	600	365	192	1,26	10,00	5,70	-
						5	278	1000	555	287	1,29	16,05	8,15	-
11291	0328	0450 0600 1000	2367	YYYY	-0000	6	328	450	348	185	1,24	8,94	5,64	-
						6	328	600	438	230	1,26	12,00	6,84	-
						6	328	1000	666	345	1,29	19,26	9,78	-
11291	0378	0450 0600 1000	2367	YYYY	-0000	7	378	450	406	215	1,24	10,43	6,58	-
						7	378	600	511	268	1,26	14,00	7,98	-
						7	378	1000	777	402	1,29	22,47	11,41	-
11291	0428	0450 0600 1000	2367	YYYY	-0000	8	428	450	464	246	1,24	11,92	7,52	-
						8	428	600	584	307	1,26	16,00	9,12	-
						8	428	1000	888	459	1,29	25,68	13,04	-
11291	0478	0450 0600 1000	2367	YYYY	-0000	9	478	450	522	277	1,24	13,41	8,46	-
						9	478	600	657	345	1,26	18,00	10,26	-
						9	478	1000	999	517	1,29	28,89	14,67	-
11291	0528	0450 0600 1000	2367	YYYY	-0000	10	528	450	580	308	1,24	14,90	9,40	-
						10	528	600	730	384	1,26	20,00	11,40	-
						10	528	1000	1110	574	1,29	32,10	16,30	-
11291	0578	0450 0600 1000	2367	YYYY	-0000	11	578	450	638	339	1,24	16,39	10,34	-
						11	578	600	803	422	1,26	22,00	12,54	-
						11	578	1000	1221	632	1,29	35,31	17,93	-
11291	0628	0450 0600 1000	2367	YYYY	-0000	12	628	450	696	369	1,24	17,88	11,28	-
						12	628	600	876	460	1,26	24,00	13,68	-
						12	628	1000	1332	689	1,29	38,52	19,56	-
11291	0678	0450 0600 1000	2367	YYYY	-0000	13	678	450	754	400	1,24	19,37	12,22	-
						13	678	600	949	499	1,26	26,00	14,82	-
						13	678	1000	1443	747	1,29	41,73	21,19	-
11291	0728	0450 0600 1000	2367	YYYY	-0000	14	728	450	812	431	1,24	20,86	13,16	-
						14	728	600	1022	537	1,26	28,00	15,96	-
						14	728	1000	1554	804	1,29	44,94	22,82	-
11291	0778	0450 0600 1000	2367	YYYY	-0000	15	778	450	870	462	1,24	22,35	14,10	-
						15	778	600	1095	575	1,26	30,00	17,10	-
						15	778	1000	1665	861	1,29	48,15	24,45	-

In conformity with EN442-1: 2014: radiators and convectors


Delivery time 15 - 30 working days
(transport duration not included)

Delivery time 15 - 30 working days
(transport duration not included)

- ref. nr. (5 digits)
- width (4 digits)
- height (4 digits)
- connection (4 digits) p. 309
- colour (4 digits) p. 10

11291	0178	0450	2367	YYYY	-0000
-------	------	------	------	------	-------

- version (4 digits)
 - 0000 = with wall brackets
 - 0001 = with feet




VINTAGE 50 / D160

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D160 : 11291														
11291	0828	0450 0600 1000	2367	YYYY	-0000	16	828	450	928	493	1,24	23,84	15,04	-
						16	828	600	1168	614	1,26	32,00	18,24	-
						16	828	1000	1776	919	1,29	51,36	26,08	-
11291	0878	0450 0600 1000	2367	YYYY	-0000	17	878	450	986	523	1,24	25,33	15,98	-
						17	878	600	1241	652	1,26	34,00	19,38	-
						17	878	1000	1887	976	1,29	54,57	27,71	-
11291	0928	0450 0600 1000	2367	YYYY	-0000	18	928	450	1044	554	1,24	26,82	16,92	-
						18	928	600	1314	690	1,26	36,00	20,52	-
						18	928	1000	1998	1034	1,29	57,78	29,34	-
11291	0978	0450 0600 1000	2367	YYYY	-0000	19	978	450	1102	585	1,24	28,31	17,86	-
						19	978	600	1387	729	1,26	38,00	21,66	-
						19	978	1000	2109	1091	1,29	60,99	30,97	-
11291	1028	0450 0600 1000	2367	YYYY	-0000	20	1028	450	1160	616	1,24	29,80	18,80	-
						20	1028	600	1460	767	1,26	40,00	22,80	-
						20	1028	1000	2220	1149	1,29	64,20	32,60	-
11291	1078	0450 0600 1000	2367	YYYY	-0000	21	1078	450	1218	646	1,24	31,29	19,74	-
						21	1078	600	1533	805	1,26	42,00	23,94	-
						21	1078	1000	2331	1206	1,29	67,41	34,23	-
11291	1128	0450 0600 1000	2367	YYYY	-0000	22	1128	450	1276	677	1,24	32,78	20,68	-
						22	1128	600	1606	844	1,26	44,00	25,08	-
						22	1128	1000	2442	1263	1,29	70,62	35,86	-
11291	1178	0450 0600 1000	2367	YYYY	-0000	23	1178	450	1334	708	1,24	34,27	21,62	-
						23	1178	600	1679	882	1,26	46,00	26,22	-
						23	1178	1000	2553	1321	1,29	73,83	37,49	-
11291	1228	0450 0600 1000	2367	YYYY	-0000	24	1228	450	1392	739	1,24	35,76	22,56	-
						24	1228	600	1752	920	1,26	48,00	27,36	-
						24	1228	1000	2664	1378	1,29	77,04	39,12	-
11291	1278	0450 0600 1000	2367	YYYY	-0000	25	1278	450	1450	770	1,24	37,25	23,50	-
						25	1278	600	1825	959	1,26	50,00	28,50	-
						25	1278	1000	2775	1436	1,29	80,25	40,75	-
11291	1328	0450 0600 1000	2367	YYYY	-0000	26	1328	450	1508	800	1,24	38,74	24,44	-
						26	1328	600	1898	997	1,26	52,00	29,64	-
						26	1328	1000	2886	1493	1,29	83,46	42,38	-
11291	1378	0450 0600 1000	2367	YYYY	-0000	27	1378	450	1566	831	1,24	40,23	25,38	-
						27	1378	600	1971	1036	1,26	54,00	30,78	-
						27	1378	1000	2997	1551	1,29	86,67	44,01	-
11291	1428	0450 0600 1000	2367	YYYY	-0000	28	1428	450	1624	862	1,24	41,72	26,32	-
						28	1428	600	2044	1074	1,26	56,00	31,92	-
						28	1428	1000	3108	1608	1,29	89,88	45,64	-

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D160)



VINTAGE 50 / D160

HOW TO ORDER VINTAGE 50



Delivery time 15 - 30 working days
(transport duration not included)

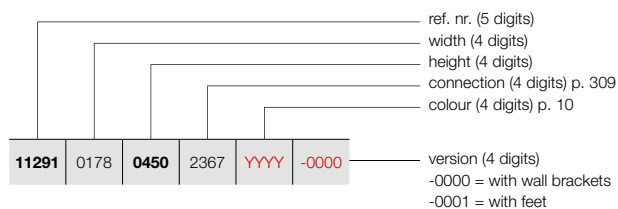

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ø50K)	55/45/20 (Watt) (ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D160 : 11291														
11291	1478	0450	2367	YYYY	-0000	29	1478	450	1682	893	1,24	43,21	27,26	-
		0600				29	1478	600	2117	1112	1,26	58,00	33,06	-
		1000				29	1478	1000	3219	1665	1,29	93,09	47,27	-
11291	1528	0450	2367	YYYY	-0000	30	1528	450	1740	924	1,24	44,70	28,20	-
		0600				30	1528	600	2190	1151	1,26	60,00	34,20	-
		1000				30	1528	1000	3330	1723	1,29	96,30	48,90	-
11291	1578	0450	2367	YYYY	-0000	31	1578	450	1798	954	1,24	46,19	29,14	-
		0600				31	1578	600	2263	1189	1,26	62,00	34,34	-
11291	1628	0450	2367	YYYY	-0000	32	1628	450	1856	985	1,24	47,68	30,08	-
		0600				32	1628	600	2336	1227	1,26	64,00	36,48	-
11291	1678	0450	2367	YYYY	-0000	33	1678	450	1914	1016	1,24	49,17	31,02	-
		0600				33	1678	600	2409	1266	1,26	66,00	37,62	-
11291	1728	0450	2367	YYYY	-0000	34	1728	450	1972	1047	1,24	50,66	31,96	-
		0600				34	1728	600	2482	1304	1,26	68,00	38,76	-
11291	1778	0450	2367	YYYY	-0000	35	1778	450	2030	1077	1,24	52,15	32,90	-
		0600				35	1778	600	2555	1342	1,26	70,00	39,90	-
11291	1828	0450	2367	YYYY	-0000	36	1828	450	2088	1108	1,24	53,64	33,84	-
		0600				36	1828	600	2628	1381	1,26	72,00	41,04	-
11291	1878	0450	2367	YYYY	-0000	37	1878	450	2146	1139	1,24	55,13	34,78	-
		0600				37	1878	600	2701	1419	1,26	74,00	42,18	-
11291	1928	0450	2367	YYYY	-0000	38	1928	450	2204	1170	1,24	56,62	35,72	-
		0600				38	1928	600	2774	1457	1,26	76,00	43,32	-
11291	1978	0450	2367	YYYY	-0000	39	1978	450	2262	1201	1,24	58,11	36,66	-
		0600				39	1978	600	2847	1496	1,26	78,00	44,46	-
11291	2028	0450	2367	YYYY	-0000	40	2028	450	2320	1231	1,24	59,60	37,60	-
		0600				40	2028	600	2920	1534	1,26	80,00	45,60	-
11291	2078	0450	2367	YYYY	-0000	41	2078	450	2378	1262	1,24	61,09	38,54	-
		0600				41	2078	600	2993	1572	1,26	82,00	46,74	-
11291	2128	0450	2367	YYYY	-0000	42	2128	450	2436	1293	1,24	62,58	39,48	-
		0600				42	2128	600	3066	1611	1,26	84,00	47,88	-
11291	2178	0450	2367	YYYY	-0000	43	2178	450	2494	1324	1,24	64,07	40,42	-
		0600				43	2178	600	3139	1649	1,26	86,00	49,02	-
11291	2228	0450	2367	YYYY	-0000	44	2228	450	2552	1355	1,24	65,56	41,36	-
		0600				44	2228	600	3212	1688	1,26	88,00	50,16	-
11291	2278	0450	2367	YYYY	-0000	45	2278	450	2610	1385	1,24	67,05	42,30	-
		0600				45	2278	600	3285	1726	1,26	90,00	51,30	-

Delivery time 15 - 30 working days
(transport duration not included)

VINTAGE (VINTAGE 50 / D160)

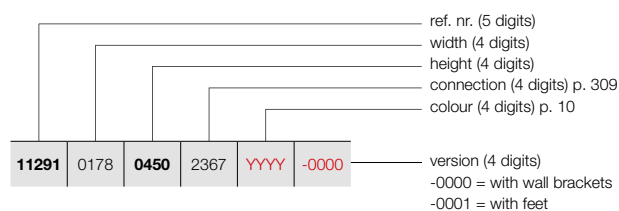


VINTAGE 50 / D160

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D160 : 11291														
11291	2328	0450 0600	2367	YYYY	-0000	46	2328	450	2668	1416	1,24	68,54	43,24	-
						46	2328	600	3358	1764	1,26	92,00	52,44	-
11291	2378	0450 0600	2367	YYYY	-0000	47	2378	450	2726	1447	1,24	70,03	44,18	-
						47	2378	600	3431	1803	1,26	94,00	53,58	-
11291	2428	0450 0600	2367	YYYY	-0000	48	2428	450	2784	1478	1,24	71,52	45,12	-
						48	2428	600	3504	1841	1,26	96,00	54,72	-
11291	2478	0450	2367	YYYY	-0000	49	2478	450	2842	1508	1,24	73,01	46,06	-
11291	2528	0450	2367	YYYY	-0000	50	2528	450	2900	1539	1,24	74,50	47,00	-
11291	2578	0450	2367	YYYY	-0000	51	2578	450	2958	1570	1,24	75,99	47,94	-
11291	2628	0450	2367	YYYY	-0000	52	2628	450	3016	1601	1,24	77,48	48,88	-
11291	2678	0450	2367	YYYY	-0000	53	2678	450	3074	1632	1,24	78,97	49,82	-
11291	2728	0450	2367	YYYY	-0000	54	2728	450	3132	1662	1,24	80,46	50,76	-
11291	2778	0450	2367	YYYY	-0000	55	2778	450	3190	1693	1,24	81,95	51,70	-
11291	2828	0450	2367	YYYY	-0000	56	2828	450	3248	1724	1,24	83,44	52,64	-
11291	2878	0450	2367	YYYY	-0000	57	2878	450	3306	1755	1,24	84,93	53,58	-
11291	2928	0450	2367	YYYY	-0000	58	2928	450	3364	1786	1,24	86,42	54,52	-
11291	2978	0450	2367	YYYY	-0000	59	2978	450	3422	1816	1,24	87,91	55,46	-
11291	3028	0450	2367	YYYY	-0000	60	3028	450	3480	1847	1,24	89,40	56,40	-

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D220)



VINTAGE 50 / D220

HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

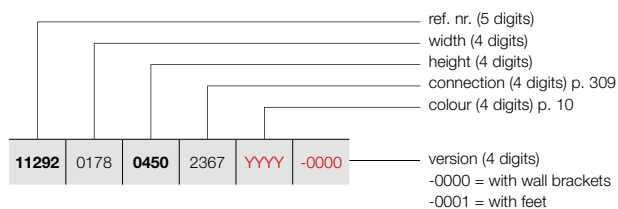


REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D220 : 11292														
11292	0178	0450	2367	YYYY	-0000	3	178	450	225	119	1,25	6,00	3,69	-
		0600				3	178	600	282	148	1,26	7,86	4,44	-
		1000				3	178	1000	435	226	1,28	13,68	7,26	-
11292	0228	0450	2367	YYYY	-0000	4	228	450	300	158	1,25	8,00	4,92	-
		0600				4	228	600	376	198	1,26	10,48	5,92	-
		1000				4	228	1000	580	302	1,28	18,24	9,68	-
11292	0278	0450	2367	YYYY	-0000	5	278	450	375	198	1,25	10,00	6,15	-
		0600				5	278	600	470	247	1,26	13,10	7,40	-
		1000				5	278	1000	725	377	1,28	22,80	12,10	-
11292	0328	0450	2367	YYYY	-0000	6	328	450	450	238	1,25	12,00	7,38	-
		0600				6	328	600	564	296	1,26	15,72	8,88	-
		1000				6	328	1000	870	452	1,28	27,36	14,52	-
11292	0378	0450	2367	YYYY	-0000	7	378	450	525	277	1,25	14,00	8,61	-
		0600				7	378	600	658	346	1,26	18,34	10,36	-
		1000				7	378	1000	1015	528	1,28	31,92	16,94	-
11292	0428	0450	2367	YYYY	-0000	8	428	450	600	317	1,25	16,00	9,84	-
		0600				8	428	600	752	395	1,26	20,96	11,84	-
		1000				8	428	1000	1160	603	1,28	36,48	19,36	-
11292	0478	0450	2367	YYYY	-0000	9	478	450	675	356	1,25	18,00	11,07	-
		0600				9	478	600	846	444	1,26	23,58	13,32	-
		1000				9	478	1000	1305	679	1,28	41,04	21,78	-
11292	0528	0450	2367	YYYY	-0000	10	528	450	750	396	1,25	20,00	12,30	-
		0600				10	528	600	940	494	1,26	26,20	14,80	-
		1000				10	528	1000	1450	754	1,28	45,60	24,20	-
11292	0578	0450	2367	YYYY	-0000	11	578	450	825	436	1,25	22,00	13,53	-
		0600				11	578	600	1034	543	1,26	28,82	16,28	-
		1000				11	578	1000	1595	829	1,28	50,16	26,62	-
11292	0628	0450	2367	YYYY	-0000	12	628	450	900	475	1,25	24,00	14,76	-
		0600				12	628	600	1128	593	1,26	31,44	17,76	-
		1000				12	628	1000	1740	905	1,28	54,72	29,04	-
11292	0678	0450	2367	YYYY	-0000	13	678	450	975	515	1,25	26,00	15,99	-
		0600				13	678	600	1222	642	1,26	34,06	19,24	-
		1000				13	678	1000	1885	980	1,28	59,28	31,46	-
11292	0728	0450	2367	YYYY	-0000	14	728	450	1050	554	1,25	28,00	17,22	-
		0600				14	728	600	1316	691	1,26	36,68	20,72	-
		1000				14	728	1000	2030	1056	1,28	63,84	33,88	-
11292	0778	0450	2367	YYYY	-0000	15	778	450	1125	594	1,25	30,00	18,45	-
		0600				15	778	600	1410	741	1,26	39,30	22,20	-
		1000				15	778	1000	2175	1131	1,28	68,40	36,30	-

In conformity with EN442-1: 2014: radiators and convectors

Delivery time 15 - 30 working days
(transport duration not included)


VINTAGE 50 / D220

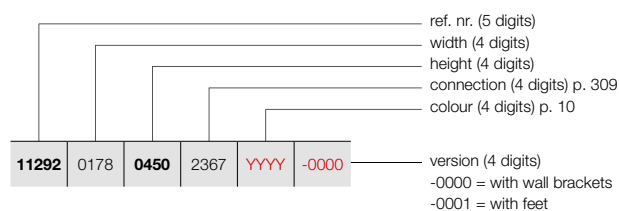

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D220 : 11292														
11292	0828	0450 0600 1000	2367	YYYY	-0000	16	828	450	1200	634	1,25	32,00	19,68	-
						16	828	600	1504	790	1,26	41,92	23,68	-
						16	828	1000	2320	1206	1,28	72,96	38,72	-
11292	0878	0450 0600 1000	2367	YYYY	-0000	17	878	450	1275	673	1,25	34,00	20,91	-
						17	878	600	1598	840	1,26	44,54	25,16	-
						17	878	1000	2465	1282	1,28	77,52	41,14	-
11292	0928	0450 0600 1000	2367	YYYY	-0000	18	928	450	1350	713	1,25	36,00	22,14	-
						18	928	600	1692	889	1,26	47,16	26,64	-
						18	928	1000	2610	1357	1,28	82,08	43,56	-
11292	0978	0450 0600 1000	2367	YYYY	-0000	19	978	450	1425	752	1,25	38,00	23,37	-
						19	978	600	1786	938	1,26	49,78	28,12	-
						19	978	1000	2755	1433	1,28	86,64	45,98	-
11292	1028	0450 0600 1000	2367	YYYY	-0000	20	1028	450	1500	792	1,25	40,00	24,60	-
						20	1028	600	1880	988	1,26	52,40	29,60	-
						20	1028	1000	2900	1508	1,28	91,20	48,40	-
11292	1078	0450 0600 1000	2367	YYYY	-0000	21	1078	450	1575	832	1,25	42,00	25,83	-
						21	1078	600	1974	1037	1,26	55,02	31,08	-
						21	1078	1000	3045	1584	1,28	95,76	50,82	-
11292	1128	0450 0600 1000	2367	YYYY	-0000	22	1128	450	1650	871	1,25	44,00	27,06	-
						22	1128	600	2068	1086	1,26	57,64	32,56	-
						22	1128	1000	3190	1659	1,28	100,32	53,24	-
11292	1178	0450 0600 1000	2367	YYYY	-0000	23	1178	450	1725	911	1,25	46,00	28,29	-
						23	1178	600	2162	1136	1,26	60,26	34,04	-
						23	1178	1000	3335	1734	1,28	104,88	55,66	-
11292	1228	0450 0600 1000	2367	YYYY	-0000	24	1228	450	1800	951	1,25	48,00	29,52	-
						24	1228	600	2256	1185	1,26	62,88	35,52	-
						24	1228	1000	3480	1810	1,28	109,44	58,08	-
11292	1278	0450 0600 1000	2367	YYYY	-0000	25	1278	450	1875	990	1,25	50,00	30,75	-
						25	1278	600	2350	1235	1,26	65,50	37,00	-
						25	1278	1000	3625	1885	1,28	114,00	60,50	-
11292	1328	0450 0600 1000	2367	YYYY	-0000	26	1328	450	1950	1030	1,25	52,00	31,98	-
						26	1328	600	2444	1284	1,26	68,12	38,48	-
						26	1328	1000	3770	1961	1,28	118,56	62,92	-
11292	1378	0450 0600 1000	2367	YYYY	-0000	27	1378	450	2025	1069	1,25	54,00	33,21	-
						27	1378	600	2538	1333	1,26	70,74	39,96	-
						27	1378	1000	3915	2036	1,28	123,12	65,34	-
11292	1428	0450 0600 1000	2367	YYYY	-0000	28	1428	450	2100	1109	1,25	56,00	34,44	-
						28	1428	600	2632	1383	1,26	73,36	41,44	-
						28	1428	1000	4060	2111	1,28	127,68	67,76	-

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D220)



VINTAGE 50 / D220

HOW TO ORDER VINTAGE 50



Delivery time 15 - 30 working days
(transport duration not included)

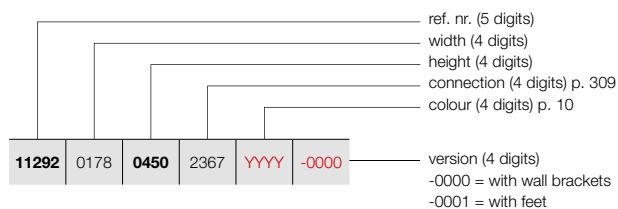

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ø50K)	55/45/20 (Watt) (ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D220 : 11292														
11292	1478	0450	2367	YYYY	-0000	29	1478	450	2175	1149	1,25	58,00	35,67	-
		0600				29	1478	600	2726	1432	1,26	75,98	42,92	-
		1000				29	1478	1000	4205	2187	1,28	132,24	70,18	-
11292	1528	0450	2367	YYYY	-0000	30	1528	450	2250	1188	1,25	60,00	36,90	-
		0600				30	1528	600	2820	1482	1,26	78,60	44,40	-
		1000				30	1528	1000	4350	2262	1,28	136,80	72,60	-
11292	1578	0450	2367	YYYY	-0000	31	1578	450	2325	1228	1,25	62,00	38,13	-
		0600				31	1578	600	2914	1531	1,26	81,22	45,88	-
11292	1628	0450	2367	YYYY	-0000	32	1628	450	2400	1267	1,25	64,00	39,36	-
		0600				32	1628	600	3008	1580	1,26	83,84	47,36	-
11292	1678	0450	2367	YYYY	-0000	33	1678	450	2475	1307	1,25	66,00	40,59	-
		0600				33	1678	600	3102	1630	1,26	86,46	48,84	-
11292	1728	0450	2367	YYYY	-0000	34	1728	450	2550	1347	1,25	68,00	41,82	-
		0600				34	1728	600	3196	1679	1,26	89,08	50,32	-
11292	1778	0450	2367	YYYY	-0000	35	1778	450	2625	1386	1,25	70,00	43,05	-
		0600				35	1778	600	3290	1728	1,26	91,70	51,80	-
11292	1828	0450	2367	YYYY	-0000	36	1828	450	2700	1426	1,25	72,00	44,28	-
		0600				36	1828	600	3384	1778	1,26	94,32	53,28	-
11292	1878	0450	2367	YYYY	-0000	37	1878	450	2775	1465	1,25	74,00	45,51	-
		0600				37	1878	600	3478	1827	1,26	96,36	54,76	-
11292	1928	0450	2367	YYYY	-0000	38	1928	450	2850	1505	1,25	76,00	46,74	-
		0600				38	1928	600	3572	1877	1,26	99,56	56,24	-
11292	1978	0450	2367	YYYY	-0000	39	1978	450	2925	1545	1,25	78,00	47,97	-
		0600				39	1978	600	3666	1926	1,26	102,18	57,72	-
11292	2028	0450	2367	YYYY	-0000	40	2028	450	3000	1584	1,25	80,00	49,20	-
		0600				40	2028	600	3760	1975	1,26	104,80	59,20	-
11292	2078	0450	2367	YYYY	-0000	41	2078	450	3075	1624	1,25	82,00	50,43	-
		0600				41	2078	600	3854	2025	1,26	107,42	60,68	-
11292	2128	0450	2367	YYYY	-0000	42	2128	450	3150	1663	1,25	84,00	51,66	-
		0600				42	2128	600	3948	2074	1,26	110,04	62,16	-
11292	2178	0450	2367	YYYY	-0000	43	2178	450	3225	1703	1,25	86,00	52,89	-
		0600				43	2178	600	4042	2124	1,26	112,66	63,64	-
11292	2228	0450	2367	YYYY	-0000	44	2228	450	3300	1743	1,25	88,00	54,12	-
		0600				44	2228	600	4136	2173	1,26	115,28	65,12	-
11292	2278	0450	2367	YYYY	-0000	45	2278	450	3375	1782	1,25	90,00	55,35	-
		0600				45	2278	600	4230	2222	1,26	117,90	66,60	-

Delivery time 15 - 30 working days
(transport duration not included)

VINTAGE (VINTAGE 50 / D220)

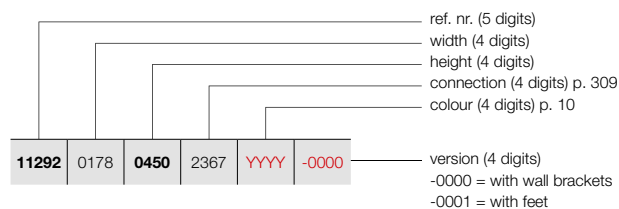


VINTAGE 50 / D220

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D220 : 11292														
11292	2328	0450 0600	2367	YYYY	-0000	46	2328	450	3450	1822	1,25	93,84	56,58	-
						46	2328	600	4324	2272	1,26	120,52	68,08	-
11292	2378	0450 0600	2367	YYYY	-0000	47	2378	450	3525	1861	1,25	94,00	57,81	-
						47	2378	600	4418	2321	1,26	123,14	69,56	-
11292	2428	0450 0600	2367	YYYY	-0000	48	2428	450	3600	1901	1,25	96,00	59,04	-
						48	2428	600	4512	2370	1,26	125,76	71,04	-
11292	2478	0450 0600	2367	YYYY	-0000	49	2478	450	3675	1941	1,25	99,96	60,27	-
						49	2478	600	4606	2420	1,26	128,38	72,52	-
11292	2528	0450 0600	2367	YYYY	-0000	50	2528	450	3750	1980	1,25	102,00	61,50	-
						50	2528	600	4700	2469	1,26	131,00	74,00	-
11292	2578	0450	2367	YYYY	-0000	51	2578	450	3825	2020	1,25	104,04	62,73	-
11292	2628	0450	2367	YYYY	-0000	52	2628	450	3900	2059	1,25	106,08	63,96	-
11292	2678	0450	2367	YYYY	-0000	53	2678	450	3975	2099	1,25	108,12	65,19	-
11292	2728	0450	2367	YYYY	-0000	54	2728	450	4050	2139	1,25	110,16	66,42	-
11292	2778	0450	2367	YYYY	-0000	55	2778	450	4125	2178	1,25	112,20	67,65	-
11292	2828	0450	2367	YYYY	-0000	56	2828	450	4200	2218	1,25	114,24	68,88	-
11292	2878	0450	2367	YYYY	-0000	57	2878	450	4275	2257	1,25	116,28	70,11	-
11292	2928	0450	2367	YYYY	-0000	58	2928	450	4350	2297	1,25	118,32	71,34	-
11292	2978	0450	2367	YYYY	-0000	59	2978	450	4425	2337	1,25	120,36	72,57	-
11292	3028	0450	2367	YYYY	-0000	60	3028	450	4500	2376	1,25	122,40	73,80	-

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D250)



VINTAGE 50 / D250

HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

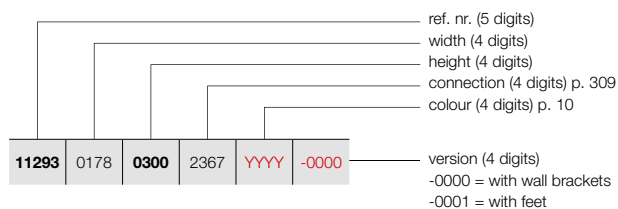


REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D250 : 11293														
11293	0178	0300	2367	YYYY	-0000	3	178	300	186	98	1,26	4,56	2,97	-
11293	0228	0300	2367	YYYY	-0000	4	228	300	248	130	1,26	6,08	3,96	-
11293	0278	0300	2367	YYYY	-0000	5	278	300	310	163	1,26	7,60	4,95	-
11293	0328	0300	2367	YYYY	-0000	6	328	300	372	195	1,26	9,12	5,94	-
11293	0378	0300	2367	YYYY	-0000	7	378	300	434	228	1,26	10,64	6,93	-
11293	0428	0300	2367	YYYY	-0000	8	428	300	496	261	1,26	12,16	7,92	-
11293	0478	0300	2367	YYYY	-0000	9	478	300	558	293	1,26	13,68	8,91	-
11293	0528	0300	2367	YYYY	-0000	10	528	300	620	326	1,26	15,20	9,90	-
11293	0578	0300	2367	YYYY	-0000	11	578	300	682	358	1,26	16,72	10,89	-
11293	0628	0300	2367	YYYY	-0000	12	628	300	744	391	1,26	18,34	11,88	-
11293	0678	0300	2367	YYYY	-0000	13	678	300	806	423	1,26	19,76	12,87	-
11293	0728	0300	2367	YYYY	-0000	14	728	300	868	456	1,26	21,28	13,86	-
11293	0778	0300	2367	YYYY	-0000	15	778	300	930	489	1,26	22,80	14,85	-
11293	0828	0300	2367	YYYY	-0000	16	828	300	992	521	1,26	24,32	15,84	-
11293	0878	0300	2367	YYYY	-0000	17	878	300	1054	554	1,26	25,84	16,83	-
11293	0928	0300	2367	YYYY	-0000	18	928	300	1116	586	1,26	27,36	17,82	-
11293	0978	0300	2367	YYYY	-0000	19	978	300	1178	619	1,26	28,88	18,81	-
11293	1028	0300	2367	YYYY	-0000	20	1028	300	1240	651	1,26	30,40	19,80	-
11293	1078	0300	2367	YYYY	-0000	21	1078	300	1302	684	1,26	31,92	20,79	-
11293	1128	0300	2367	YYYY	-0000	22	1128	300	1364	717	1,26	33,44	21,78	-
11293	1178	0300	2367	YYYY	-0000	23	1178	300	1426	749	1,26	34,96	22,77	-
11293	1228	0300	2367	YYYY	-0000	24	1228	300	1488	782	1,26	36,68	23,76	-
11293	1278	0300	2367	YYYY	-0000	25	1278	300	1550	814	1,26	38,00	24,75	-
11293	1328	0300	2367	YYYY	-0000	26	1328	300	1612	847	1,26	39,52	25,74	-
11293	1378	0300	2367	YYYY	-0000	27	1378	300	1674	879	1,26	41,04	26,73	-
11293	1428	0300	2367	YYYY	-0000	28	1428	300	1736	912	1,26	42,56	27,72	-
11293	1478	0300	2367	YYYY	-0000	29	1478	300	1798	945	1,26	44,08	28,71	-


In conformity with EN442-1: 2014: radiators and convectors

HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

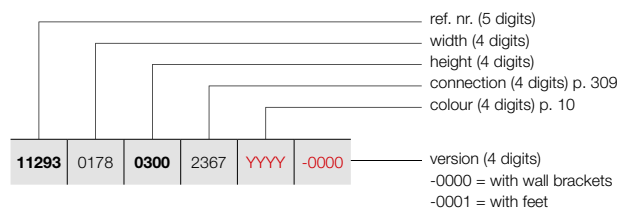

VINTAGE (VINTAGE 50 / D250)




VINTAGE 50 / D250

REFERENCE CODE CUSTOM MADE VINTAGE 50						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D250 : 11293														
11293	1528	0300	2367	YYYY	-0000	30	1528	300	1860	977	1,26	45,60	29,70	-
11293	1578	0300	2367	YYYY	-0000	31	1578	300	1922	1010	1,26	47,12	30,69	-
11293	1628	0300	2367	YYYY	-0000	32	1628	300	1984	1042	1,26	48,64	31,68	-
11293	1678	0300	2367	YYYY	-0000	33	1678	300	2046	1075	1,26	50,16	32,67	-
11293	1728	0300	2367	YYYY	-0000	34	1728	300	2108	1107	1,26	51,68	33,66	-
11293	1778	0300	2367	YYYY	-0000	35	1778	300	2170	1140	1,26	53,20	34,65	-
11293	1828	0300	2367	YYYY	-0000	36	1828	300	2232	1173	1,26	55,02	35,64	-
11293	1878	0300	2367	YYYY	-0000	37	1878	300	2294	1205	1,26	56,24	36,63	-
11293	1928	0300	2367	YYYY	-0000	38	1928	300	2356	1238	1,26	57,76	37,62	-
11293	1978	0300	2367	YYYY	-0000	39	1978	300	2418	1270	1,26	59,28	38,61	-
11293	2028	0300	2367	YYYY	-0000	40	2028	300	2480	1303	1,26	60,80	39,60	-
11293	2078	0300	2367	YYYY	-0000	41	2078	300	2542	1336	1,26	62,32	40,59	-
11293	2128	0300	2367	YYYY	-0000	42	2128	300	2604	1368	1,26	63,84	41,58	-
11293	2178	0300	2367	YYYY	-0000	43	2178	300	2666	1401	1,26	65,36	42,57	-
11293	2228	0300	2367	YYYY	-0000	44	2228	300	2728	1433	1,26	66,88	43,56	-
11293	2278	0300	2367	YYYY	-0000	45	2278	300	2790	1466	1,26	68,40	44,55	-
11293	2328	0300	2367	YYYY	-0000	46	2328	300	2852	1498	1,26	69,92	45,54	-
11293	2378	0300	2367	YYYY	-0000	47	2378	300	2914	1531	1,26	71,44	46,53	-
11293	2428	0300	2367	YYYY	-0000	48	2428	300	2976	1564	1,26	73,36	47,52	-
11293	2478	0300	2367	YYYY	-0000	49	2478	300	3038	1596	1,26	74,48	48,51	-
11293	2528	0300	2367	YYYY	-0000	50	2528	300	3100	1629	1,26	76,00	49,50	-
11293	2578	0300	2367	YYYY	-0000	51	2578	300	3162	1661	1,26	77,52	50,49	-
11293	2628	0300	2367	YYYY	-0000	52	2628	300	3224	1694	1,26	79,04	51,48	-
11293	2678	0300	2367	YYYY	-0000	53	2678	300	3286	1726	1,26	80,56	52,47	-
11293	2728	0300	2367	YYYY	-0000	54	2728	300	3348	1759	1,26	82,08	53,46	-
11293	2778	0300	2367	YYYY	-0000	55	2778	300	3410	1792	1,26	83,60	54,45	-
11293	2828	0300	2367	YYYY	-0000	56	2828	300	3472	1824	1,26	85,12	55,44	-

In conformity with EN442-1: 2014: radiators and convectors


VINTAGE (VINTAGE 50 / D250)



VINTAGE 50 / D250

HOW TO ORDER VINTAGE 50

Delivery time 15 - 30 working days
(transport duration not included)

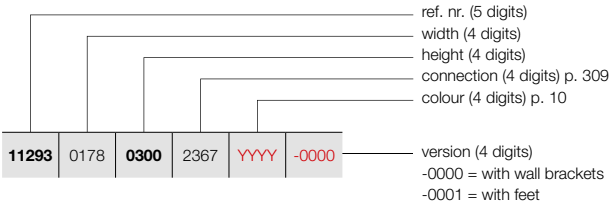

REFERENCE CODE CUSTOM MADE VINTAGE 50	TECHNICAL DATA								
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ϕ 50K)	55/45/20 (Watt) (ϕ 30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. VINTAGE 50/D250 : 11293									
11293 2878 0300 2367 YYYY -0000	57	2878	300	3534	1857	1,26	86,64	56,43	-
11293 2928 0300 2367 YYYY -0000	58	2928	300	3596	1889	1,26	88,16	57,42	-
11293 2978 0300 2367 YYYY -0000	59	2978	300	3658	1922	1,26	89,68	58,41	-
11293 3028 0300 2367 YYYY -0000	60	3028	300	3720	1954	1,26	91,70	59,40	-

In conformity with EN442-1: 2014: radiators and convectors


PRODUCT GROUP: ACC SUP

BRACKETS			COLOUR
		VINTAGE 50	
WALL BRACKETS			in the colour of the radiator*
		VINTAGE 50	
FEET		2 feet for 25 columns 3 feet for 50 columns 4 feet for 60 columns	in the colour of the radiator* in the colour of the radiator* in the colour of the radiator*

* The feet and brackets of radiators in transparant coating are lacquered in the colour N507.


VINTAGE CONNECTIONS

VINTAGE: VINTAGE 50

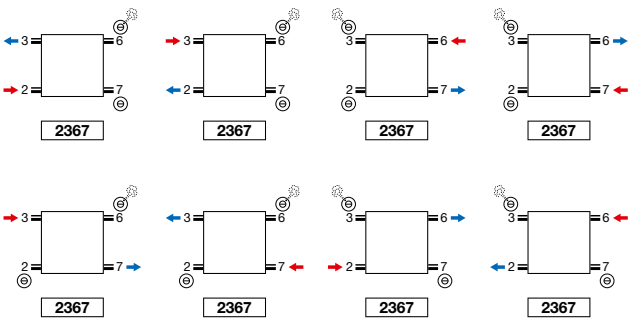

- Air vent in connection 3 or 6

VINTAGE: VINTAGE 50




- Air vent in connection 3 or 6
- Connections on special demand: supplement €70

Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.


VINTAGE TECHNICAL DRAWINGS

VINTAGE (VINTAGE 50)

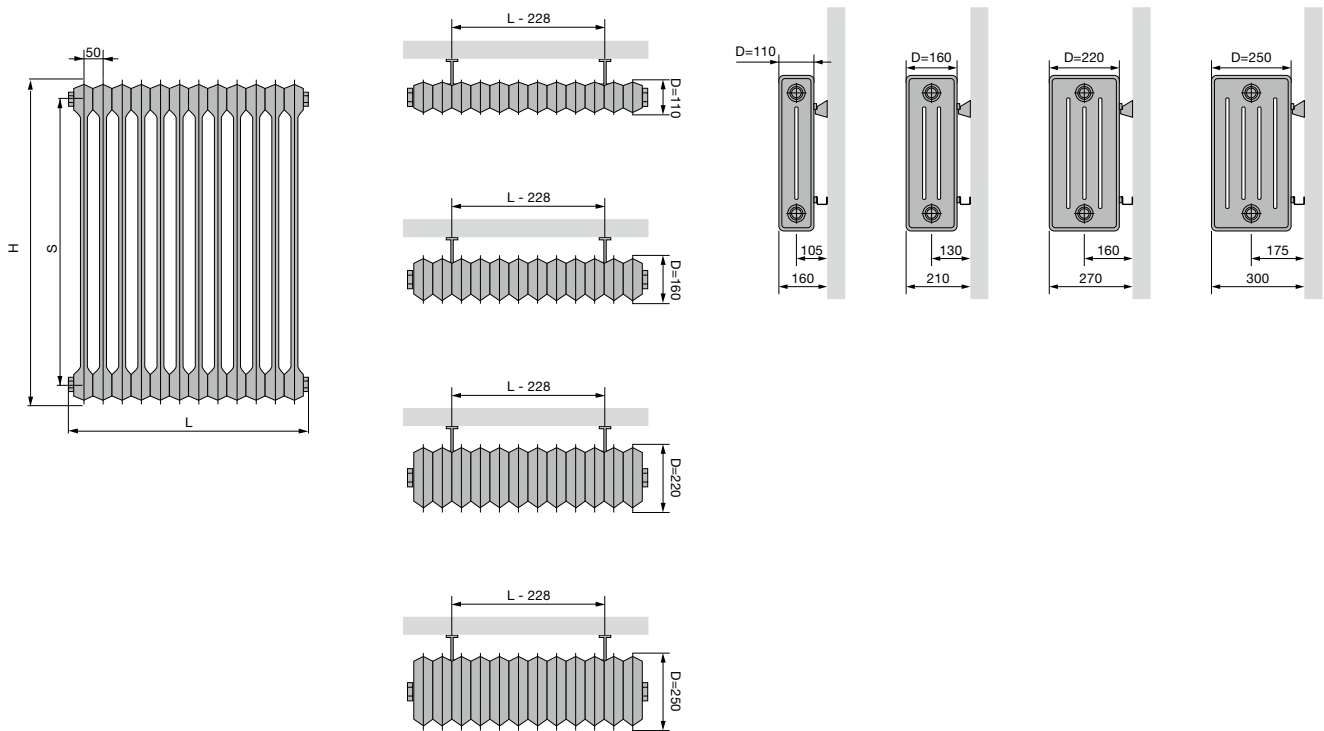


VINTAGE 50				
Height (H)	300	450	600	1000
Centre between the lateral connections (S)	200	350	500	900

VINTAGE (VINTAGE 50)

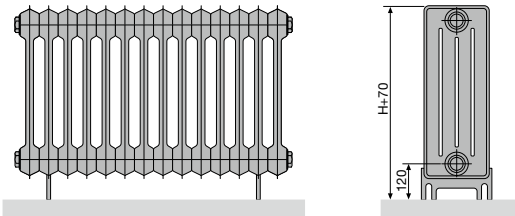

VINTAGE 50 (FLOOR MOUNTING)

Number of columns	2-25	26-50	51-60
Number of feet	2	3	4

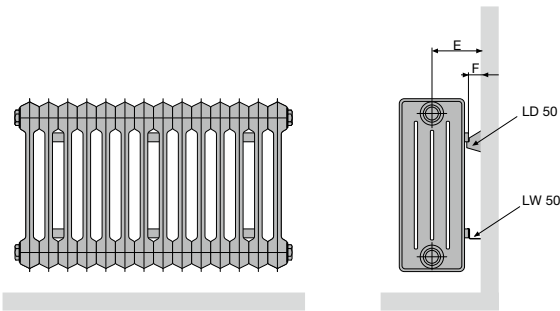


VINTAGE 50 (WALL MOUNTING) LD 50 + LW 50

Depth (D)	110	160	220	250
Distance between wall and connection (E)	105	130	160	175
Distance between wall and backside radiator (F)	50			


VINTAGE 50 (WALL MOUNTING)

Number of columns	3-5	6-25	26-50	51-60
Number of wall brackets set LD 50 + LW 50	1	2	3	4




VINTAGE 50


Height (H)	300	450	600	1000
Centre between the lateral connections (S)	200	350	500	900




3-5 tubes



6-25 tubes



26-50 tubes

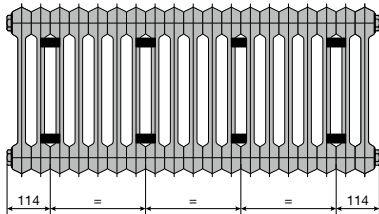

51-60 tubes