



# WINDOW® ELECTRIC

design **Beatrice De Sanctis**



**EUROPEAN WARRANTY**

## MATERIAL:

Heating body and handle in ultra-thin painted mild steel.

## FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.

The fixing kits are compliant with VDI 6034 norm, class 4.

## FEATURES:

The exclusive design of the Window towel warmer combines aesthetics and functionality.

The heated handle can be extracted, acting as support for warming the towels. The opening and closing of the handle are manually operated. Window has been designed to offer maximum comfort of use by differentiating the temperature of the handle from that of the body.

The temperature of the handle is kept lower than that of the radiator body, so to allow a safe grip without sacrificing the maximum heat output provided by the radiator body at the normal operating temperatures of the heating system.

## PACKAGING:

The radiator is protected with a film in polyethylene and cardboard box. Use and maintenance notice included.

## PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2). Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

## COLORS:

Radiators and accessories: standard white R01 color.

Electrical resistors: CLASS 2

Minimum class protection: IP 44

Seasonal energy efficiency  $\eta_s$ :  $\geq 38\%$

Control: Power unit + Digital chrono thermostat in radio frequency

Wire Length: 1000 mm with Schuko plug

## PRODUCT CERTIFICATES



## AWARD




reddot winner 2022

## HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.


In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



## BICOLOR

BODY	FRAME	BODY	FRAME	BODY	FRAME
<b>F30</b> WHITE SAND	<b>F36</b> TERRA	<b>T20</b> WHITE GREY	<b>T17</b> ACAI MATT	<b>F25</b> QUARTZ DUST	<b>F23</b> SPARKLING GREY

Available color combinations.

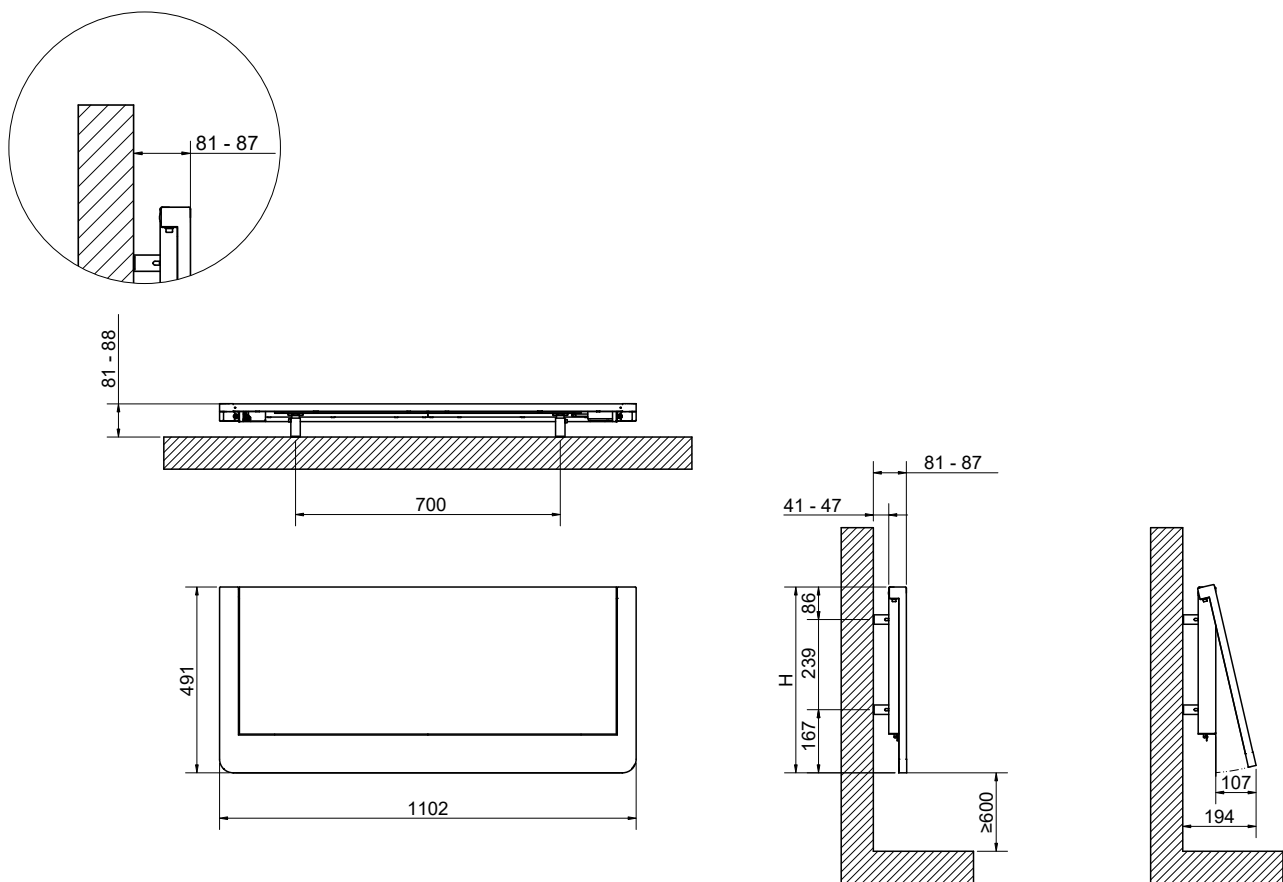

## WINDOW<sup>®</sup> ELECTRIC

Art. Nr.	Height		Width	Thermal output	Weight
	H [mm]	L [mm]	Watt	Kg	
DIGITAL CHRONOTHERMOSTAT KIT IN RADIOFREQUENCY SCHUKO PLUG 230V 50HZ CLASS 2					
3581420002002	<b>495</b>	1100	454	18	

Art. Nr. are referred to WHITE R01 color version.

## WINDOW<sup>®</sup> BICOLOR ELECTRIC

Art. Nr.	Color		Height	Width	Thermal output	Weight
	BODY	FRAME	H [mm]	L [mm]	Watt	Kg
DIGITAL CHRONOTHERMOSTAT KIT IN RADIOFREQUENCY SCHUKO PLUG 230V 50HZ CLASS 2						
3581420002004	<b>F30</b>	<b>F36</b>	<b>495</b>	1100	454	18
3581420002005	<b>T20</b>	<b>T17</b>				
3581420002006	<b>F25</b>	<b>F23</b>				

## REMOTE-CONTROL



- WEEKLY AND DAILY PROGRAMMING
- OPEN WINDOW SENSOR
- OPERATING MODE SELECTION (Auto, Comfort, Eco, Frost Protection)
- BOOST (FORCED START)
- INDICATION OF ENERGY CONSUMPTION
- LOCK / UNLOCK
- LOCK / UNLOCK WITH PIN
- AMBIENT TEMPERATURE LIMITATION
- SURFACE TEMPERATURE LIMITATION
- POSSIBILITY TO CONTROL UP TO 5 DEVICES