

TYPES

- One (ZV-1) or two rows (ZV-2)

TUBES

- Vertical, rectangular 45 x 20 mm

COLLECTORS

- Horizontal, rear, round Ø 35 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour

BRACKETS

- Wall brackets standard

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 110°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator



TECHNICAL DRAWINGS

- See p. 193

CONNECTION

- ✓ One-point connection for one-pipe system (order as special radiator) **(on demand)** (see p. 315)
- ✓ One-point connection for two-pipe system (order as special radiator) **(on demand)** (see p. 315)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 314)
- ✓ Two-point connection for two-pipe system (standard) (see p. 314)
- ✗ Integrated valve
- Connections: ½" (inner thread)

RECOMMENDED CONNECTION (1188)



ref. nr. 1182 103 0000 0099

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail straight (chrome)
ref. nr. see p. 191



ZANA VERTICAL

Tradition and trends in perfect harmony

The Zana combines an unbeatable power with timeless lines. A classic that remains captivating because of its power, class and comfort. The retro feeling is never far away. Modernity is abounding in this unique range of designer radiators for every environment, every room, and every use.




ZANA VERTICAL (ZV-1)



ZV-1

HOW TO ORDER ZANA VERTICAL

Delivery time 15 - 30 working days
(transport duration not included)

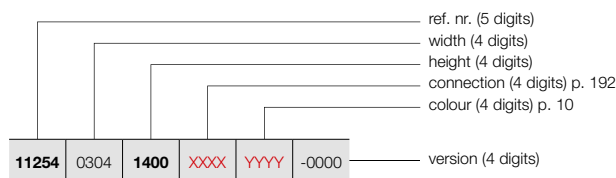

REFERENCE CODE CUSTOM MADE ZANA VERTICAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. ZANA VERTICAL ZV-1 : 11254														
11254	0304	1400	XXXX	YYYY	-0000	8	304	1400	680	359	1,27	18,16	8,24	-
		8				304	1600	769	406	1,27	20,72	9,44	-	
		8				304	1800	859	454	1,28	23,20	10,64	-	
		8				304	2000	950	502	1,28	25,68	11,68	-	
		8				304	2200	1042	550	1,28	28,08	12,72	-	
		8				304	2400	1136	600	1,29	30,56	13,76	-	
		8				304	2600	1231	650	1,29	33,04	14,80	-	
		8				304	2800	1327	701	1,29	35,44	15,84	-	
		8				304	3000	1426	753	1,29	37,92	16,88	-	
11254	0384	1400	XXXX	YYYY	-0000	10	384	1400	850	449	1,27	22,70	10,30	-
		10				384	1600	962	508	1,27	25,90	11,80	-	
		10				384	1800	1074	567	1,28	29,00	13,30	-	
		10				384	2000	1188	627	1,28	32,10	14,60	-	
		10				384	2200	1303	688	1,28	35,10	15,90	-	
		10				384	2400	1420	750	1,29	38,20	17,20	-	
		10				384	2600	1539	813	1,29	41,30	18,50	-	
		10				384	2800	1659	876	1,29	44,30	19,80	-	
		10				384	3000	1782	941	1,29	47,40	21,10	-	
11254	0464	1400	XXXX	YYYY	-0000	12	464	1400	1020	539	1,27	27,24	12,36	-
		12				464	1600	1154	609	1,27	31,08	14,16	-	
		12				464	1800	1289	681	1,28	34,80	15,96	-	
		12				464	2000	1425	752	1,28	38,52	17,52	-	
		12				464	2200	1563	825	1,28	42,12	19,08	-	
		12				464	2400	1704	900	1,29	45,84	20,64	-	
		12				464	2600	1846	975	1,29	49,56	22,20	-	
		12				464	2800	1991	1051	1,29	53,16	23,76	-	
		12				464	3000	2139	1130	1,29	56,88	25,32	-	
11254	0544	1400	XXXX	YYYY	-0000	14	544	1400	1190	628	1,27	31,78	14,42	-
		14				544	1600	1346	711	1,27	36,26	16,52	-	
		14				544	1800	1504	794	1,28	40,60	18,62	-	
		14				544	2000	1663	878	1,28	44,94	20,44	-	
		14				544	2200	1824	963	1,28	49,14	22,26	-	
		14				544	2400	1988	1050	1,29	53,48	24,08	-	
		14				544	2600	2154	1137	1,29	57,82	25,90	-	
		14				544	2800	2323	1227	1,29	62,02	27,72	-	
		14				544	3000	2495	1318	1,29	66,36	29,54	-	
11254	0624	1400	XXXX	YYYY	-0000	16	624	1400	1360	718	1,27	36,32	16,48	-
		16				624	1600	1539	813	1,27	41,44	18,88	-	
		16				624	1800	1719	908	1,28	46,40	21,28	-	
		16				624	2000	1900	1003	1,28	51,36	23,36	-	
		16				624	2200	2085	1101	1,28	56,16	25,44	-	
		16				624	2400	2272	1200	1,29	61,12	27,52	-	
		16				624	2600	2462	1300	1,29	66,08	29,60	-	
		16				624	2800	2655	1402	1,29	70,88	31,68	-	
16	624	3000	2852	1506	1,29	75,84	33,76	-						

HOW TO ORDER ZANA VERTICAL
Delivery time 15 - 30 working days
(transport duration not included)

ZANA VERTICAL (ZV-1)

							ref. nr. (5 digits)
							width (4 digits)
							height (4 digits)
							connection (4 digits) p. 192
							colour (4 digits) p. 10
11254	0304	1400	XXXX	YYYY	-0000		version (4 digits)



ZV-1

REFERENCE CODE CUSTOM MADE ZANA VERTICAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. ZANA VERTICAL ZV-1 : 11254														
11254	0704	1400	XXXX	YYYY	-0000	18	704	1400	1531	808	1,27	40,86	18,54	-
		1600				18	704	1600	1731	914	1,27	46,62	21,24	-
		1800				18	704	1800	1933	1021	1,28	52,20	23,94	-
		2000				18	704	2000	2138	1129	1,28	57,78	26,28	-
		2200				18	704	2200	2345	1238	1,28	63,18	28,62	-
		2400				18	704	2400	2555	1349	1,29	68,76	30,96	-
		2600				18	704	2600	2769	1462	1,29	74,34	33,30	-
		2800				18	704	2800	2987	1577	1,29	79,74	35,64	-
		3000				18	704	3000	3208	1694	1,29	85,32	37,98	-
11254	0784	1400	XXXX	YYYY	-0000	20	784	1400	1701	898	1,27	45,40	20,60	-
		1600				20	784	1600	1923	1015	1,27	51,80	23,60	-
		1800				20	784	1800	2148	1134	1,28	58,00	26,60	-
		2000				20	784	2000	2375	1254	1,28	64,20	29,20	-
		2200				20	784	2200	2606	1376	1,28	70,20	31,80	-
		2400				20	784	2400	2839	1499	1,29	76,40	34,40	-
		2600				20	784	2600	3077	1625	1,29	82,60	37,00	-
		2800				20	784	2800	3319	1753	1,29	88,60	39,60	-
		3000				20	784	3000	3564	1882	1,29	94,80	42,20	-
11254	0864	1400	XXXX	YYYY	-0000	22	864	1400	1871	988	1,27	49,94	22,66	-
		1600				22	864	1600	2116	1117	1,27	56,98	25,96	-
		1800				22	864	1800	2363	1248	1,28	63,80	29,26	-
		2000				22	864	2000	2613	1380	1,28	70,62	32,12	-
		2200				22	864	2200	2866	1513	1,28	77,22	34,98	-
		2400				22	864	2400	3123	1649	1,29	84,04	37,84	-
		2600				22	864	2600	3385	1788	1,29	90,86	40,70	-
		2800				22	864	2800	3650	1927	1,29	97,46	43,56	-
		3000				22	864	3000	3921	2071	1,29	104,28	46,42	-
11254	0944	1400	XXXX	YYYY	-0000	24	944	1400	2041	1078	1,27	54,48	24,72	-
		1600				24	944	1600	2308	1219	1,27	62,16	28,32	-
		1800				24	944	1800	2578	1361	1,28	69,60	31,92	-
		2000				24	944	2000	2850	1505	1,28	77,04	35,04	-
		2200				24	944	2200	3127	1651	1,28	84,24	38,16	-
		2400				24	944	2400	3407	1799	1,29	91,68	41,28	-
		2600				24	944	2600	3692	1950	1,29	99,12	44,40	-
		2800				24	944	2800	3982	2103	1,29	106,32	47,52	-
		3000				24	944	3000	4277	2259	1,29	113,76	50,64	-
11254	1024	1400	XXXX	YYYY	-0000	26	1024	1400	2211	1168	1,27	59,02	26,78	-
		1600				26	1024	1600	2500	1320	1,27	67,34	30,68	-
		1800				26	1024	1800	2793	1475	1,28	75,40	34,58	-
		2000				26	1024	2000	3088	1631	1,28	83,46	37,96	-
		2200				26	1024	2200	3388	1789	1,28	91,26	41,34	-
		2400				26	1024	2400	3691	1949	1,29	99,32	44,72	-
		2600				26	1024	2600	4000	2112	1,29	107,38	48,10	-
		2800				26	1024	2800	4314	2278	1,29	115,18	51,48	-
		3000				26	1024	3000	4634	2447	1,29	123,24	54,86	-

In conformity with EN442-1: 2014: radiators and convectors


ZANA VERTICAL (ZV-2)



ZV-2


HOW TO ORDER ZANA VERTICAL

Delivery time 15 - 30 working days
(transport duration not included)

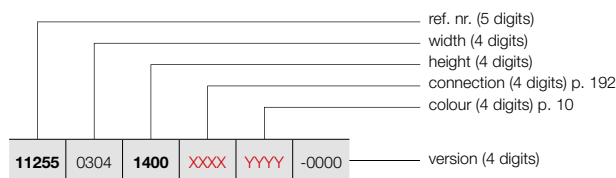

HOW TO ORDER STOCK RADIATOR ZANA VERTICAL

Delivery time 5 working days
(transport duration not included)



REFERENCE CODE CUSTOM MADE ZANA VERTICAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. ZANA VERTICAL ZV-2 : 11255														
11255	0304	1400	XXXX	YYYY	-0000	8	304	1400	1105	584	1,30	35,20	16,16	-
		8				304	1600	1242	656	1,30	40,16	18,40	-	
		8				304	1800	1379	728	1,30	45,12	20,64	-	
		8				304	2000	1515	800	1,30	50,00	23,28	-	
		8				304	2200	1651	872	1,30	54,80	25,92	-	
		8				304	2400	1788	944	1,30	59,68	28,56	-	
		8				304	2600	1925	1017	1,30	64,48	31,12	-	
		8				304	2800	2062	1089	1,30	69,36	33,76	-	
		8				304	3000	2200	1162	1,30	74,16	36,40	-	
11255	0384	1400	XXXX	YYYY	-0000	10	384	1400	1381	729	1,30	44,00	20,20	-
		10				384	1600	1553	820	1,30	50,20	23,00	-	
		10				384	1800	1724	910	1,30	56,40	25,80	-	
		10				384	2000	1894	1000	1,30	62,50	29,10	-	
		10				384	2200	2064	1090	1,30	68,50	32,40	-	
		10				384	2400	2235	1180	1,30	74,60	35,70	-	
		10				384	2600	2406	1271	1,30	80,60	38,90	-	
		10				384	2800	2577	1361	1,30	86,70	42,20	-	
		10				384	3000	2750	1452	1,30	92,70	45,50	-	
11255	0464	1400	XXXX	YYYY	-0000	12	464	1400	1657	875	1,30	52,80	24,24	-
		12				464	1600	1863	984	1,30	60,24	27,60	-	
		12				464	1800	2068	1092	1,30	67,68	30,96	-	
		12				464	2000	2273	1200	1,30	75,00	34,92	-	
		12				464	2200	2477	1308	1,30	82,20	38,88	-	
		12				464	2400	2682	1416	1,30	89,52	42,84	-	
		12				464	2600	2887	1525	1,30	96,72	46,68	-	
		12				464	2800	3093	1633	1,30	104,04	50,64	-	
		12				464	3000	3300	1743	1,30	111,24	54,60	-	
11255	0544	1400	XXXX	YYYY	-0000	14	544	1400	1933	1021	1,30	61,60	28,28	-
		14				544	1600	2174	1148	1,30	70,28	32,20	-	
		14				544	1800	2413	1274	1,30	78,96	36,12	-	
		14				544	2000	2651	1400	1,30	87,50	40,74	-	
		14				544	2200	2890	1526	1,30	95,90	45,36	-	
		14				544	2400	3129	1652	1,30	104,44	49,98	-	
		14				544	2600	3368	1779	1,30	112,84	54,46	-	
		14				544	2800	3608	1905	1,30	121,38	59,08	-	
		14				544	3000	3849	2033	1,30	129,78	63,70	-	
11255	0624	1400	XXXX	YYYY	-0000	16	624	1400	2209	1167	1,30	70,40	32,32	-
		16				624	1600	2484	1312	1,30	80,32	36,80	-	
		16				624	1800	2758	1456	1,30	90,24	41,28	-	
		16				624	2000	3030	1600	1,30	100,00	46,56	-	
		16				624	2200	3303	1744	1,30	109,60	51,84	-	
		16				624	2400	3576	1888	1,30	119,36	57,12	-	
		16				624	2600	3849	2033	1,30	128,96	62,24	-	
		16				624	2800	4124	2178	1,30	138,72	67,52	-	
		16				624	3000	4399	2323	1,30	148,32	72,80	-	

Delivery time 15 - 30 working days
(transport duration not included)

Delivery time 15 - 30 working days
(transport duration not included)

- ref. nr. (5 digits)
- width (4 digits)
- height (4 digits)
- connection (4 digits) p. 192
- colour (4 digits) p. 10

11255	0304	1400	XXXX	YYYY	-0000	version (4 digits)
-------	------	------	------	------	-------	--------------------

Delivery time 5 working days
(transport duration not included)

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

11255	-00	see table below
-------	-----	-----------------




ZV-2

REFERENCE CODE CUSTOM MADE ZANA VERTICAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. ZANA VERTICAL ZV-2 : 11255														
11255	0704	1400	XXXX	YYYY	-0000	18	704	1400	2486	1313	1,30	79,20	36,36	-
		1600				18	704	1600	2795	1476	1,30	90,36	41,40	-
		1800				18	704	1800	3102	1638	1,30	101,52	46,44	-
		2000				18	704	2000	3409	1800	1,30	112,50	52,38	-
		2200				18	704	2200	3716	1962	1,30	123,30	58,32	-
		2400				18	704	2400	4023	2124	1,30	134,28	64,26	-
		2600				18	704	2600	4330	2287	1,30	145,08	70,02	-
		2800				18	704	2800	4639	2450	1,30	156,06	75,96	-
11255	0784	1400	XXXX	YYYY	-0000	20	784	1400	2762	1459	1,30	88,00	40,40	-
		1600				20	784	1600	3105	1640	1,30	100,40	46,00	-
		1800				20	784	1800	3447	1820	1,30	112,80	51,60	-
		2000				20	784	2000	3788	2000	1,30	125,00	58,20	-
		2200				20	784	2200	4129	2180	1,30	137,00	64,80	-
		2400				20	784	2400	4470	2360	1,30	149,20	71,40	-
		2600				20	784	2600	4812	2541	1,30	161,20	77,80	-
11255	0864	1400	XXXX	YYYY	-0000	22	864	1400	3038	1604	1,30	96,80	44,44	-
		1600				22	864	1600	3416	1804	1,30	110,44	50,60	-
		1800				22	864	1800	3792	2002	1,30	124,08	56,76	-
		2000				22	864	2000	4167	2200	1,30	137,50	64,02	-
		2200				22	864	2200	4541	2398	1,30	150,70	71,28	-
11255	0944	1400	XXXX	YYYY	-0000	24	944	1400	3314	1750	1,30	105,60	48,48	-
		1600				24	944	1600	3726	1968	1,30	120,48	55,20	-
		1800				24	944	1800	4136	2184	1,30	135,36	61,92	-
		2000				24	944	2000	4545	2400	1,30	150,00	69,84	-
11255	1024	1400	XXXX	YYYY	-0000	26	1024	1400	3590	1896	1,30	114,40	52,52	-
		1600				26	1024	1600	4037	2132	1,30	130,52	59,80	-
		1800				26	1024	1800	4481	2366	1,30	146,64	67,08	-


In conformity with EN442-1: 2014: radiators and convectors

ZANA VERTICAL (ZV-1, ZV-2)

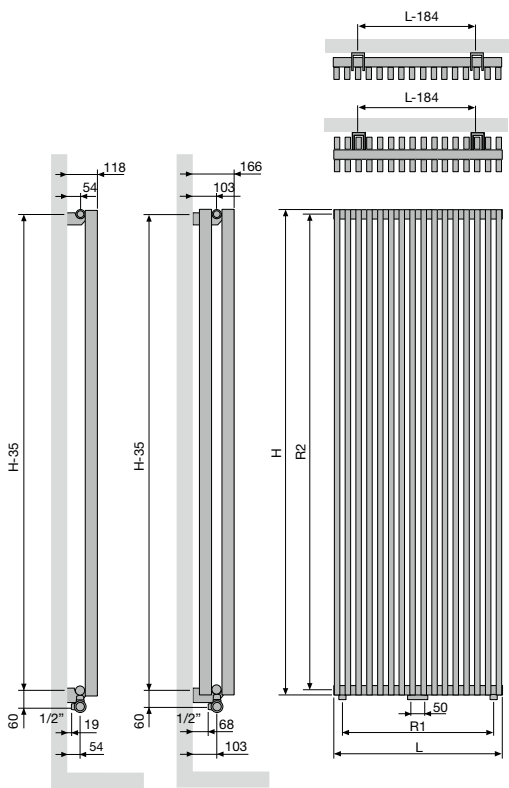

		ZV-1 / ZV-2									
Number of tubes		8	10	12	14	16	18	20	22	24	26
Width (L)		304	384	464	544	624	704	784	864	944	1024
Centre between the connections at the bottom 18 (R1)		240	320	400	480	560	640	720	800	880	960
Height (H)		1400	1600	1800	2000	2200	2400	2600	2800	3000	
Centre between the lateral connections 23/67 (R2)		1365	1565	1765	1965	2165	2365	2565	2765	2965	
Centre between the brackets		L-184	H-35								

ZANA HORIZONTAL (ZH-1, ZH-2)

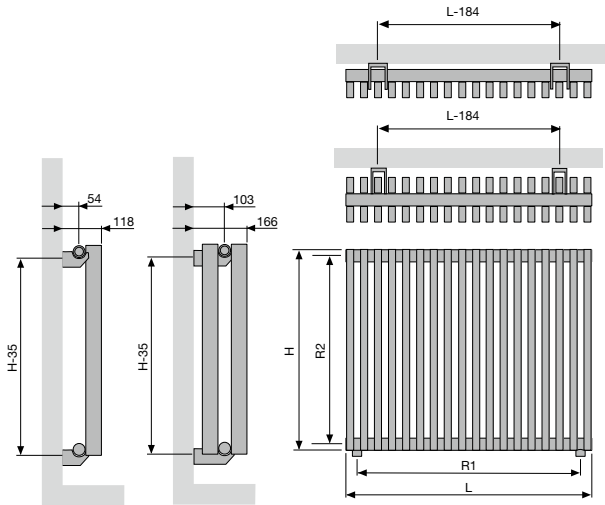

		ZH-1 / ZH-2									
Width (L)		384	704	784	864	944	1024	1104	1184	1264	1424
Centre between the connections at the bottom 18 (R1)		320	640	720	800	880	960	1040	1120	1200	1360
Height (H)		500	600	700							
Centre between the lateral connections 23/67 (R2)		465	565	665							
Centre between the brackets		L-184	H-35								