


Flaps


DESIGN VICTOR VASILEV




Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.277
Watt Δt 40° = Watt Δt 50° x 0.741
Watt Δt 30° = Watt Δt 50° x 0.504
Watt Δt 20° = Watt Δt 50° x 0.292


p max = 6.5 bar

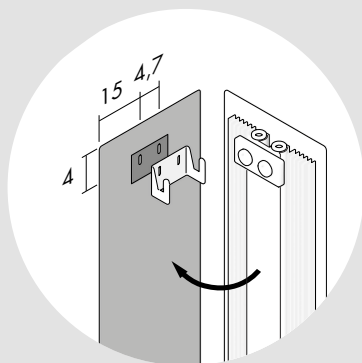


Flaps A


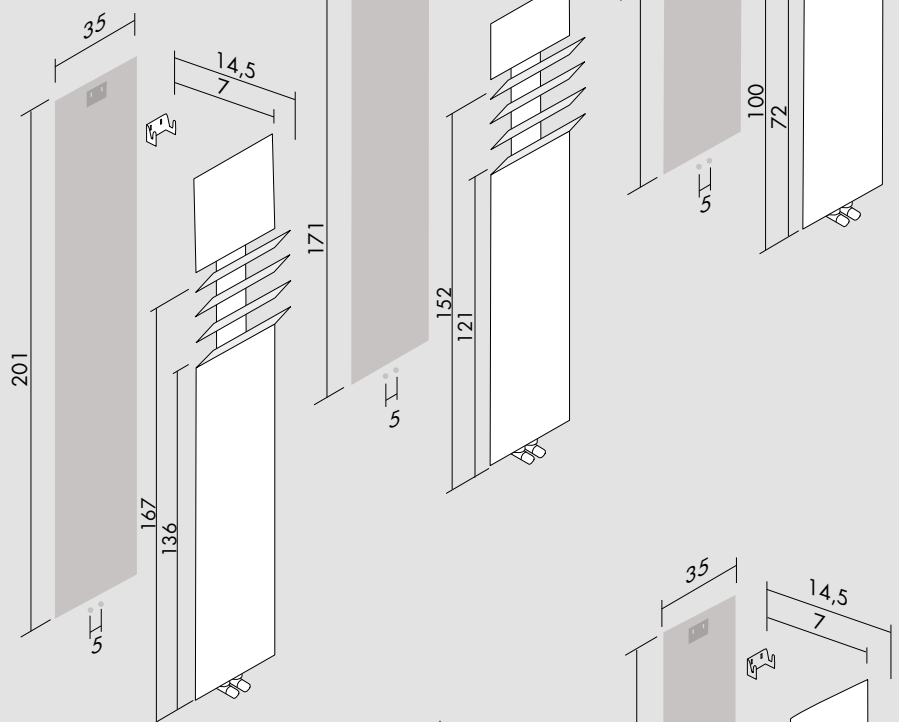


Flaps B

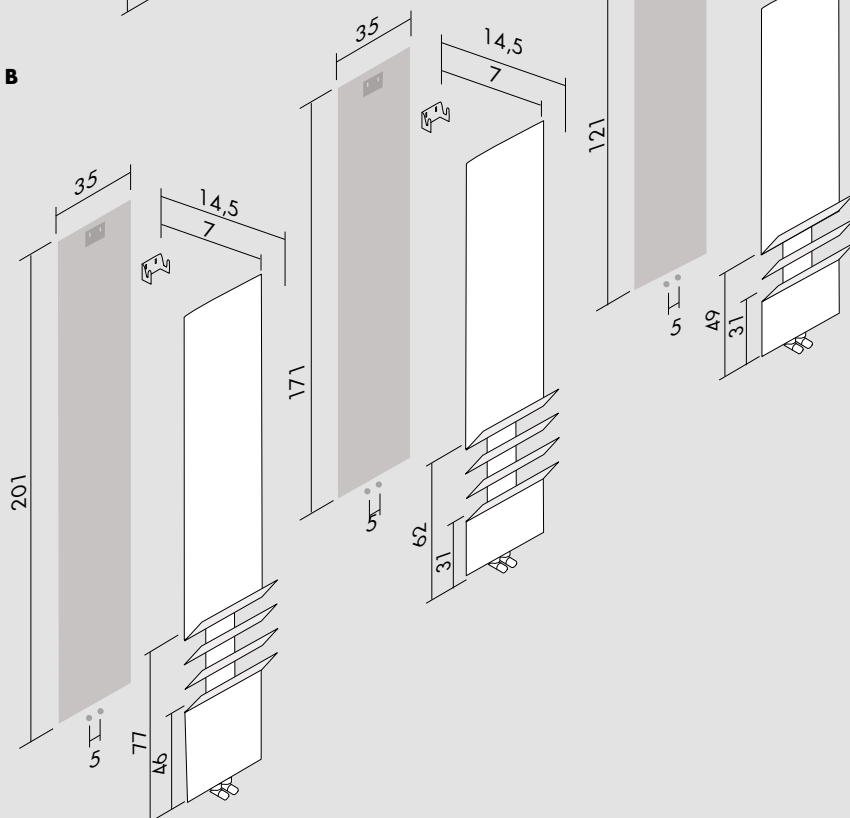

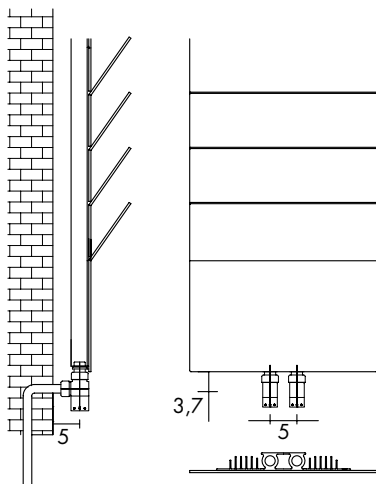[F]Standard connection / Raccord standard
Standard Anschluss / Conexión estándar**[H]**

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

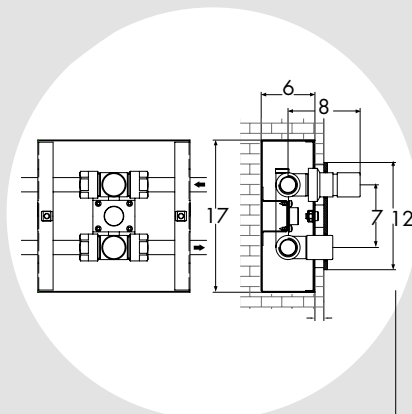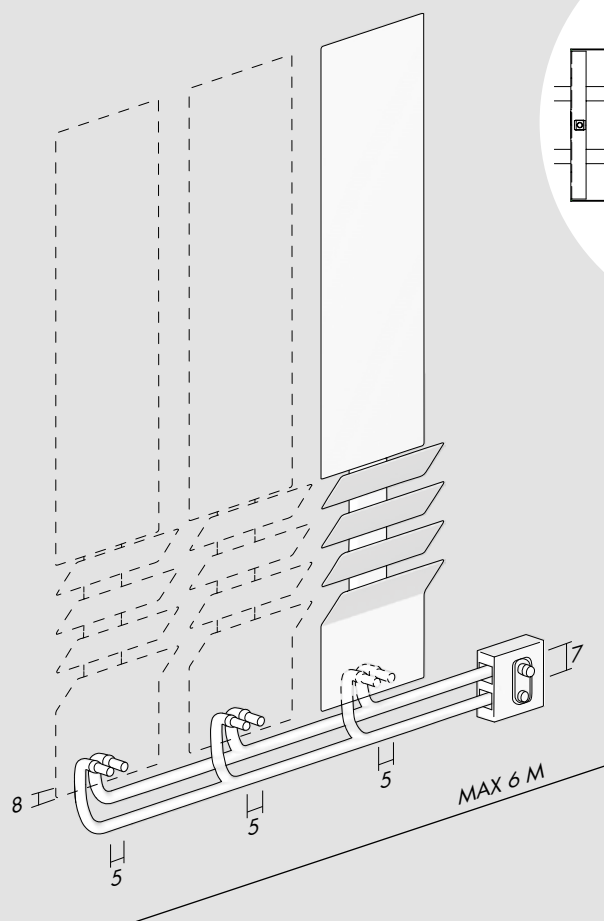Built-in valves
Vanne à encastrer
Einbauventile
Válvulas de empotrar**[CROM] E12VIR****Flaps A**

H cm	L cm	I* cm	art*	Li*	watt Δt 30°	watt Δt 50°
121.0	35.0	5.0	FPA121001_	0.8	218	432
171.0	35.0	5.0	FPA171001_	1.2	290	575
201.0	35.0	5.0	FPA201001_	1.4	353	701


Flaps B

H cm	L cm	I* cm	art*	Li*	watt Δt 30°	watt Δt 50°
121.0	35.0	5.0	FPB121001_	0.8	218	432
171.0	35.0	5.0	FPB171001_	1.2	290	575
201.0	35.0	5.0	FPB201001_	1.4	353	701

[BASIC]

BCOR

NEOP

OptionalReverse Valve
Vanne reverse
Reverse Ventil
Válvula a escuadra inversa**[CROM] E12RVR**Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático**[CROM] TTR**Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo**[CROM] C5R**Towel hooks
Patère
Crochet das Bugel
Percha**[CROM] AFTR**
[COLOR] AFTC
[GOLD] AFTG*other colors and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

Li* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento

P* = page / page / Seite / página