

Kcal = Watt x 0.860  
BTU = Watt x 3.413

Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.264  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.750  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.518  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.307



p max = 10.0 bar

Treo O





H cm	L cm	l* cm	l* cm	art*	l* <sup>2</sup>	watt $\Delta t$ 30°	watt $\Delta t$ 50°
39.8	203.0	196.0	45.8	TROS203010	5.1	248	479

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar



Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

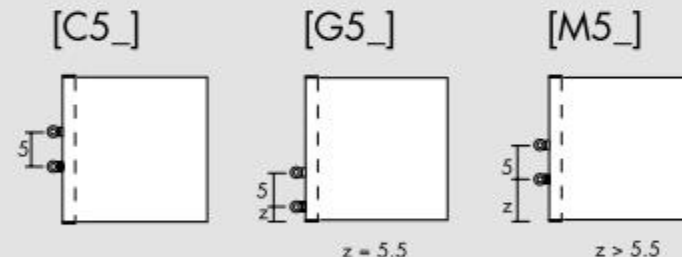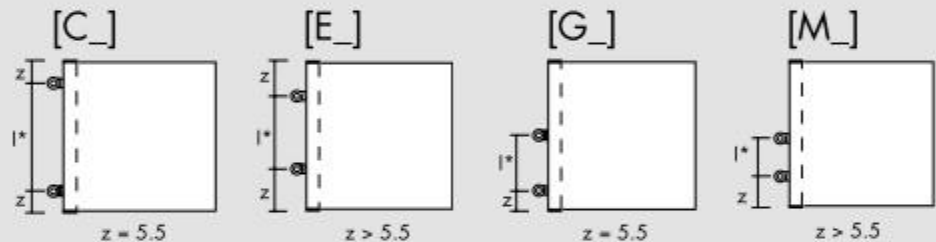

Replace \_ with connection S (Left) or D (Right). / Remplacer le \_ avec raccordement S (Gauche) ou D (Droite). /  
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol \_ mit S (links) oder D (rechts) ersetzen. /  
Sustituir el \_ con las conexiones S (Izquierda) o D (Derecha).

Optional




Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra

[BIAN] E12SQB  
[CROM] E12SQR



Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático

[BIAN] TTB  
[CROM] TTR



Sleeving kit  
Kit couvre tuyau  
Rosetten  
Kit cubre tubo

[BIAN] CSB  
[CROM] CSR



$\varnothing \leq 16$  mm  
[BIAN] CTB  
[CROM] CTR

$16 \text{ mm} < \varnothing < 24$  mm  
[BIAN] CWB  
[CROM] CWR

art\* = item / modèle / Artikel / artículo    l\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
l\*<sup>2</sup> = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
P\* = page / page / Seite / página