






LINEA PLUS FREESTANDING

DIMENSIONS (in mm)

HEIGHT 020

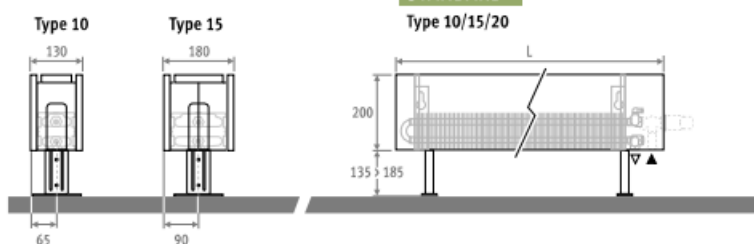

HEIGHT 035

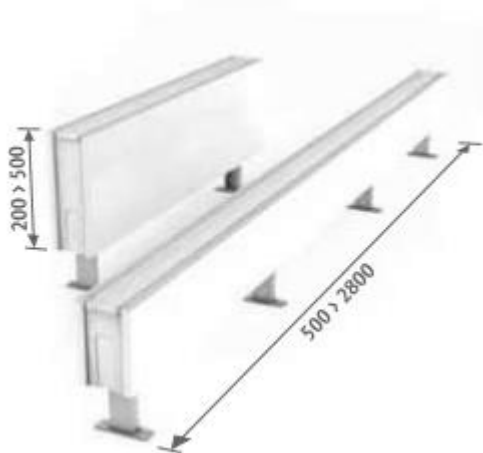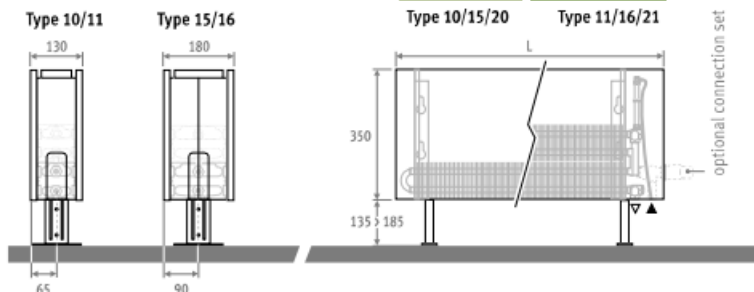

Slim Line & Powerful

- For spaces with large window, glazed facades, for window displays, conservatories, under window seats and for dwarf walls.
- Discreet slim-line design with flat front panel and stylish aluminum grille.
- No wasteful heat loss from radiation through glazing.
- Low-H₂O technology with super conductive and ultra-fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed facades or ventilation grilles.
- Suitable for integrated valve.
- Safe surface temperature.

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
- sandblast grey (001), fine texture metallic lacquer

Other colours: see colour chart.

CONNECTION

Standard connection:
bottom end left or right

OPTIONS


Feet in the same colour as the casing

For feet in the same colour as the casing, repeat the colour code after the code of the radiator.

ex.: LINF. HHH LLL TT.XXX/XXX

Extended adjustable feet

- For installation on a rough subfloor or computer floor.
- For extended feet in neutral grey, add /AL to the ordering code.
ex.: LINF. 020 050 10.XXX/AL
- For extended feet in the same colour as the casing, add /AL to the ordering code and repeat the colour code.
ex.: LINF. 020 050 10.XXX/AL/XXX

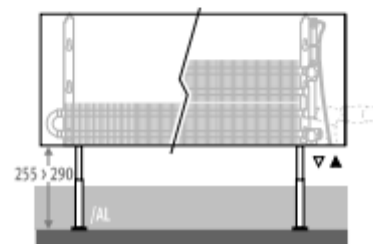

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

HEIGHT 200-350 - OUTPUT TABLES

LINE.FHH LLL TT.XXX

HEIGHT 200				HEIGHT 350			HEIGHT 350		
L	Type	Watts	Watts	Type	Watts	Watts	Type	Watts	Watts
mm		75/65	55/45		75/65	55/45		75/65	55/45
500	10	271	130	10	392	190	10	524	249
	15	483	233	15	673	330	15	733	347
600	10	325	156	10	470	228	10	629	298
	15	580	280	15	808	396	15	879	416
700	10	379	182	10	548	265	10	734	348
	15	676	327	15	942	461	15	1026	485
800	10	433	208	10	626	303	10	838	398
	15	773	373	15	1077	527	15	1172	555
900	10	487	234	10	705	341	10	943	447
	15	869	420	15	1211	593	15	1319	624
1000	10	541	260	10	783	379	10	1048	497
	15	966	467	15	1346	659	15	1465	693
1100	10	595	286	10	861	417	10	1153	547
	15	1063	514	15	1481	725	15	1612	763
1200	10	649	312	10	940	455	10	1258	597
	15	1159	560	15	1615	791	15	1758	832
1400	10	757	364	10	1096	531	10	1467	696
	15	1352	653	15	1884	922	15	2051	970
1600	10	866	416	10	1253	607	10	1677	795
	15	1546	747	15	2154	1055	15	2344	1109
1800	10	974	468	10	1409	683	10	1886	895
	15	1739	840	15	2423	1186	15	2637	1248
2000	10	1082	520	10	1566	759	10	2096	994
	15	1932	933	15	2692	1318	15	2930	1386
2200	10	1190	571	10	1723	835	10	2306	1094
	15	2125	1027	15	2961	1450	15	3223	1525
2400	10	1298	623	10	1879	910	10	2515	1193
	15	2318	1120	15	3230	1581	15	3516	1664
2600	10	1407	676	10	2036	986	10	2725	1293
	15	2512	1214	15	3500	1714	15	3809	1802
2800	10	1515	728	10	2192	1062	10	2934	1392
	15	2705	1307	15	3769	1845	15	4102	1941

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344

The Radiator Centre reserves the right to alter design, specifications and prices without prior notice.

All prices shown exclude VAT. All sales are subject to our standard Terms and Conditions which can be found on www.theradiatocentre.com All heat outputs are shown at an operating temperatures of 75/65/20 ($\Delta t50^\circ$).
To recalculate to show at 90/70/20 ($\Delta t60^\circ$) multiply by 1.264.

All radiators will be supplied with the necessary fixture and fittings - brackets, air vents, etc.
Valves are not included in the prices quoted above

Head Office

The Radiator Centre, 7 Holywell Hill, St Albans, AL1 1EU

Tel: 01727 840344