

CARRÉ HORIZONTAL (CPHN1-RO, CPHN2-RO)



TYPES

- One (CPHN1-RO) or two rows (CPHN2-RO) of tubes

TUBES

- Horizontal, square 25 x 25 mm

COLLECTORS

- Vertical, round Ø 35 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart

SPECIAL

- CPHN1-RO also available as toilet radiator (600 x 415 mm)

BRACKETS

- Wall brackets in the colour RAL 9016 standard. Also in option available in the colour RAL 7016

TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

-

CONNECTION


- ✓ One-point connection for one-pipe system (order as special radiator) **(on demand)** (see p. 315)
- ✓ One-point connection for two-pipe system (order as special radiator) **(on demand)** (see p. 315)
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (see p. 314)
- ✗ Integrated valve
- Connections: ½" (inner thread)

CARRÉ HORIZONTAL

Top design for all your heating requirements

The horizontal version of the Carré, with your choice of one or two rows of pipes, for customised heat emission in any room. A designer radiator that also in the horizontal version, stands out thanks to its sleek design and flat look, enhanced by the fully integrated collector.

RECOMMENDED CONNECTION (0018)



Other connection methods, see p. 171



ref. nr. 1182 101 0000 0099

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail straight (chrome)
ref. nr. see p. 170




HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days
(transport duration not included)

CARRÉ HORIZONTAL (CPHN1-RO)


11133	0600	0295	XXXX	YYYY	-0000	
						ref. nr. (5 digits)
						width (4 digits)
						height (4 digits)
						connection (4 digits) p. 171
						colour (4 digits) p. 10
						version (4 digits)



CPHN1-RO

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN1-RO : 11133														
11133	0600	0295	XXXX	YYYY	-0000	10	600	295	221	117	1,25	6,19	2,85	-
		0355				12	600	355	259	137	1,25	7,41	3,60	-
		0415				14	600	415	296	156	1,25	8,63	4,35	-
		0475				16	600	475	333	176	1,25	9,86	5,10	-
		0535				18	600	535	369	195	1,25	11,08	5,85	-
		0595				20	600	595	404	213	1,25	12,30	6,60	-
		0655				22	600	655	439	231	1,26	13,42	6,94	-
		0775				26	600	775	507	266	1,26	15,67	7,63	-
		0895				30	600	895	574	302	1,26	17,91	8,31	-
11133	0800	0295	XXXX	YYYY	-0000	10	800	295	295	156	1,25	8,25	3,80	-
		0355				12	800	355	346	183	1,25	9,88	4,80	-
		0415				14	800	415	395	209	1,25	11,51	5,80	-
		0475				16	800	475	444	234	1,25	13,14	6,80	-
		0535				18	800	535	492	260	1,25	14,77	7,80	-
		0595				20	800	595	538	284	1,25	16,40	8,80	-
		0655				22	800	655	585	307	1,26	17,90	9,26	-
		0775				26	800	775	676	355	1,26	20,89	10,17	-
		0895				30	800	895	766	402	1,26	23,88	11,08	-
11133	1000	0295	XXXX	YYYY	-0000	10	1000	295	369	195	1,25	10,31	4,75	-
		0355				12	1000	355	432	228	1,25	12,35	6,00	-
		0415				14	1000	415	494	261	1,25	14,39	7,25	-
		0475				16	1000	475	555	293	1,25	16,43	8,50	-
		0535				18	1000	535	615	325	1,25	18,46	9,75	-
		0595				20	1000	595	673	355	1,25	20,50	11,00	-
		0655				22	1000	655	731	384	1,26	22,37	11,57	-
		0775				26	1000	775	845	444	1,26	26,11	12,71	-
		0895				30	1000	895	957	503	1,26	29,85	13,85	-
11133	1200	0295	XXXX	YYYY	-0000	10	1200	295	443	234	1,25	12,37	5,70	-
		0355				12	1200	355	518	274	1,25	14,82	7,20	-
		0415				14	1200	415	593	313	1,25	17,27	8,70	-
		0475				16	1200	475	666	352	1,25	19,72	10,20	-
		0535				18	1200	535	738	390	1,25	22,15	11,70	-
		0595				20	1200	595	808	427	1,25	24,60	13,20	-
		0655				22	1200	655	877	461	1,26	26,84	13,88	-
		0775				26	1200	775	1014	533	1,26	31,33	15,25	-
		0895				30	1200	895	1148	603	1,26	35,82	16,62	-
11133	1400	0295	XXXX	YYYY	-0000	10	1400	295	517	273	1,25	14,43	6,65	-
		0355				12	1400	355	605	319	1,25	17,29	8,40	-
		0415				14	1400	415	692	365	1,25	20,15	10,15	-
		0475				16	1400	475	777	410	1,25	23,00	11,90	-
		0535				18	1400	535	861	455	1,25	25,84	13,65	-
		0595				20	1400	595	942	497	1,25	28,70	15,40	-
		0655				22	1400	655	1023	537	1,26	31,32	16,20	-
		0775				26	1400	775	1183	622	1,26	36,55	17,79	-
		0895				30	1400	895	1340	704	1,26	41,79	19,39	-


CARRÉ HORIZONTAL (CPHN1-RO)



CPHN1-RO

HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days
(transport duration not included)

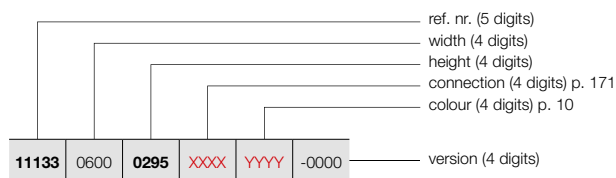


REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ø50K)	55/45/20 (Watt) (ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN1-RO : 11133														
11133	1600	0295	XXXX	YYYY	-0000	10	1600	295	590	312	1,25	16,50	7,60	-
		12				1600	355	691	365	1,25	19,76	9,60	-	
		14				1600	415	790	417	1,25	23,02	11,60	-	
		16				1600	475	888	469	1,25	26,29	13,60	-	
		18				1600	535	984	520	1,25	29,54	15,60	-	
		20				1600	595	1077	569	1,25	32,80	17,60	-	
		22				1600	655	1170	615	1,26	35,79	18,51	-	
		26				1600	775	1352	710	1,26	41,78	20,34	-	
		30				1600	895	1531	804	1,26	47,76	22,16	-	
11133	1800	0295	XXXX	YYYY	-0000	10	1800	295	664	351	1,25	18,56	8,55	-
		12				1800	355	778	411	1,25	22,23	10,80	-	
		14				1800	415	889	469	1,25	25,90	13,05	-	
		16				1800	475	999	528	1,25	29,57	15,30	-	
		18				1800	535	1107	585	1,25	33,23	17,55	-	
		20				1800	595	1211	639	1,25	36,90	19,80	-	
		22				1800	655	1316	691	1,26	40,27	20,83	-	
		26				1800	775	1521	799	1,26	47,00	22,88	-	
		30				1800	895	1723	905	1,26	53,73	24,93	-	
11133	2000	0295	XXXX	YYYY	-0000	10	2000	295	738	390	1,25	20,62	9,50	-
		12				2000	355	864	456	1,25	24,70	12,00	-	
		14				2000	415	988	522	1,25	28,78	14,50	-	
		16				2000	475	1110	586	1,25	32,86	17,00	-	
		18				2000	535	1230	650	1,25	36,92	19,50	-	
		20				2000	595	1346	711	1,25	41,00	22,00	-	
		22				2000	655	1462	768	1,26	44,74	23,14	-	
		26				2000	775	1690	888	1,26	52,22	25,42	-	
		30				2000	895	1914	1006	1,26	59,70	27,70	-	
11133	2200	0295	XXXX	YYYY	-0000	10	2200	295	812	429	1,25	22,68	10,45	-
		12				2200	355	950	502	1,25	27,17	13,20	-	
		14				2200	415	1087	574	1,25	31,66	15,95	-	
		16				2200	475	1221	645	1,25	36,15	18,70	-	
		18				2200	535	1353	714	1,25	40,61	21,45	-	
		20				2200	595	1481	782	1,25	45,10	24,20	-	
		22				2200	655	1608	845	1,26	49,21	25,45	-	
		26				2200	775	1859	977	1,26	57,44	27,96	-	
		30				2200	895	2105	1106	1,26	65,67	30,47	-	
11133	2400	0295	XXXX	YYYY	-0000	10	2400	295	886	468	1,25	24,74	11,40	-
		12				2400	355	1037	548	1,25	29,64	14,40	-	
		14				2400	415	1186	626	1,25	34,54	17,40	-	
		16				2400	475	1332	703	1,25	39,43	20,40	-	
		18				2400	535	1476	779	1,25	44,30	23,40	-	
		20				2400	595	1615	853	1,25	49,20	26,40	-	
		22				2400	655	1754	922	1,26	53,69	27,77	-	
		26				2400	775	2028	1065	1,26	62,66	30,50	-	
		30				2400	895	2297	1207	1,26	71,64	33,24	-	

HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days
(transport duration not included)

							ref. nr. (5 digits)
							width (4 digits)
							height (4 digits)
							connection (4 digits) p. 171
							colour (4 digits) p. 10
11133	0600	0295	XXXX	YYYY	-0000		version (4 digits)

CARRÉ HORIZONTAL (CPHN1-RO)



CPHN1-RO

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN1-RO : 11133														
11133	2600	0295	XXXX	YYYY	-0000	10	2600	295	959	506	1,25	26,81	12,35	-
		0355				12	2600	355	1123	593	1,25	32,11	15,60	-
		0415				14	2600	415	1284	678	1,25	37,41	18,85	-
		0475				16	2600	475	1443	762	1,25	42,72	22,10	-
		0535				18	2600	535	1599	844	1,25	48,00	25,35	-
		0595				20	2600	595	1750	924	1,25	53,30	28,60	-
		0655				22	2600	655	1901	999	1,26	58,16	30,08	-
		0775				26	2600	775	2197	1154	1,26	67,89	33,05	-
		0895				30	2600	895	2488	1307	1,26	77,61	36,01	-
11133	2800	0295	XXXX	YYYY	-0000	10	2800	295	1033	545	1,25	28,87	13,30	-
		0355				12	2800	355	1210	639	1,25	34,58	16,80	-
		0415				14	2800	415	1383	730	1,25	40,29	20,30	-
		0475				16	2800	475	1554	821	1,25	46,00	23,80	-
		0535				18	2800	535	1722	909	1,25	51,69	27,30	-
		0595				20	2800	595	1884	995	1,25	57,40	30,80	-
		0655				22	2800	655	2047	1075	1,26	62,64	32,40	-
		0775				26	2800	775	2366	1243	1,26	73,11	35,59	-
		0895				30	2800	895	2680	1408	1,26	83,58	38,78	-
11133	3000	0295	XXXX	YYYY	-0000	10	3000	295	1107	585	1,25	30,93	14,25	-
		0355				12	3000	355	1296	684	1,25	37,05	18,00	-
		0415				14	3000	415	1482	783	1,25	43,17	21,75	-
		0475				16	3000	475	1665	879	1,25	49,29	25,50	-
		0535				18	3000	535	1845	974	1,25	55,38	29,25	-
		0595				20	3000	595	2019	1066	1,25	61,50	33,00	-
		0655				22	3000	655	2193	1152	1,26	67,11	34,71	-
		0775				26	3000	775	2535	1332	1,26	78,33	38,13	-
		0895				30	3000	895	2871	1508	1,26	89,55	41,55	-

In conformity with EN442-1: 2014: radiators and convectors


CARRÉ HORIZONTAL (CPHN2-RO)



CPHN2-RO

HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days
(transport duration not included)

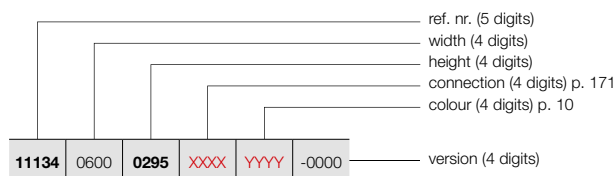


REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN2-RO : 11134														
11134	0600	0295	XXXX	YYYY	-0000	10	600	295	377	200	1,24	11,94	6,06	-
		0355				12	600	355	459	242	1,25	14,26	7,27	-
		0415				14	600	415	539	282	1,27	16,57	8,48	-
		0475				16	600	475	617	321	1,28	18,89	9,70	-
		0535				18	600	535	693	359	1,29	21,20	10,91	-
		0595				20	600	595	766	394	1,30	23,52	12,12	-
		0655				22	600	655	836	430	1,30	25,85	13,39	-
		0775				26	600	775	967	498	1,30	30,50	15,94	-
		0895				30	600	895	1087	560	1,30	35,16	18,48	-
11134	0800	0295	XXXX	YYYY	-0000	10	800	295	503	267	1,24	15,92	8,08	-
		0355				12	800	355	612	323	1,25	19,01	9,70	-
		0415				14	800	415	719	376	1,27	22,10	11,31	-
		0475				16	800	475	823	428	1,28	25,18	12,93	-
		0535				18	800	535	924	478	1,29	28,27	14,54	-
		0595				20	800	595	1021	526	1,30	31,36	16,16	-
		0655				22	800	655	1114	573	1,30	34,46	17,86	-
		0775				26	800	775	1290	664	1,30	40,67	21,25	-
		0895				30	800	895	1449	746	1,30	46,88	24,64	-
11134	1000	0295	XXXX	YYYY	-0000	10	1000	295	629	334	1,24	19,90	10,10	-
		0355				12	1000	355	765	404	1,25	23,76	12,12	-
		0415				14	1000	415	899	470	1,27	27,62	14,14	-
		0475				16	1000	475	1029	535	1,28	31,48	16,16	-
		0535				18	1000	535	1155	598	1,29	35,34	18,18	-
		0595				20	1000	595	1276	657	1,30	39,20	20,20	-
		0655				22	1000	655	1393	717	1,30	43,08	22,32	-
		0775				26	1000	775	1612	830	1,30	50,84	26,56	-
		0895				30	1000	895	1811	932	1,30	58,60	30,80	-
11134	1200	0295	XXXX	YYYY	-0000	10	1200	295	755	401	1,24	23,88	12,12	-
		0355				12	1200	355	918	485	1,25	28,51	14,54	-
		0415				14	1200	415	1079	564	1,27	33,14	16,97	-
		0475				16	1200	475	1235	642	1,28	37,78	19,39	-
		0535				18	1200	535	1386	717	1,29	42,41	21,82	-
		0595				20	1200	595	1531	788	1,30	47,04	24,24	-
		0655				22	1200	655	1672	861	1,30	51,70	26,78	-
		0775				26	1200	775	1934	996	1,30	61,01	31,87	-
		0895				30	1200	895	2173	1119	1,30	70,32	36,96	-
11134	1400	0295	XXXX	YYYY	-0000	10	1400	295	881	468	1,24	27,86	14,14	-
		0355				12	1400	355	1071	566	1,25	33,26	16,97	-
		0415				14	1400	415	1259	658	1,27	38,67	19,80	-
		0475				16	1400	475	1441	749	1,28	44,07	22,62	-
		0535				18	1400	535	1617	837	1,29	49,48	25,45	-
		0595				20	1400	595	1786	919	1,30	54,88	28,28	-
		0655				22	1400	655	1950	1004	1,30	60,31	31,25	-
		0775				26	1400	775	2257	1162	1,30	71,18	37,18	-
		0895				30	1400	895	2535	1305	1,30	82,04	43,12	-

In conformity with EN442-1: 2014: radiators and convectors

Delivery time 15 - 30 working days
(transport duration not included)

CARRÉ HORIZONTAL (CPHN2-RO)

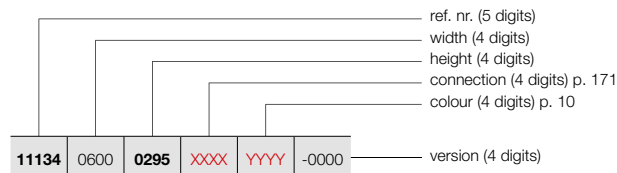

CPHN2-RO

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN2-RO : 11134														
11134	1600	0295	XXXX	YYYY	-0000	10	1600	295	1006	534	1,24	31,84	16,16	-
		0355				12	1600	355	1224	646	1,25	38,02	19,39	-
		0415				14	1600	415	1438	752	1,27	44,19	22,62	-
		0475				16	1600	475	1646	856	1,28	50,37	25,86	-
		0535				18	1600	535	1848	956	1,29	56,54	29,09	-
		0595				20	1600	595	2042	1051	1,30	62,72	32,32	-
		0655				22	1600	655	2229	1147	1,30	68,93	35,71	-
		0775				26	1600	775	2579	1328	1,30	81,34	42,50	-
		0895				30	1600	895	2898	1492	1,30	93,76	49,28	-
11134	1800	0295	XXXX	YYYY	-0000	10	1800	295	1132	601	1,24	35,82	18,18	-
		0355				12	1800	355	1377	727	1,25	42,77	21,82	-
		0415				14	1800	415	1618	846	1,27	49,72	25,45	-
		0475				16	1800	475	1852	963	1,28	56,66	29,09	-
		0535				18	1800	535	2079	1076	1,29	63,61	32,72	-
		0595				20	1800	595	2297	1182	1,30	70,56	36,36	-
		0655				22	1800	655	2507	1290	1,30	77,54	40,18	-
		0775				26	1800	775	2902	1494	1,30	91,51	47,81	-
		0895				30	1800	895	3260	1678	1,30	105,48	55,44	-
11134	2000	0295	XXXX	YYYY	-0000	10	2000	295	1258	668	1,24	39,80	20,20	-
		0355				12	2000	355	1530	808	1,25	47,52	24,24	-
		0415				14	2000	415	1798	940	1,27	55,24	28,28	-
		0475				16	2000	475	2058	1070	1,28	62,96	32,32	-
		0535				18	2000	535	2310	1195	1,29	70,68	36,36	-
		0595				20	2000	595	2552	1314	1,30	78,40	40,40	-
		0655				22	2000	655	2786	1434	1,30	86,16	44,64	-
		0775				26	2000	775	3224	1660	1,30	101,68	53,12	-
		0895				30	2000	895	3622	1864	1,30	117,20	61,60	-
11134	2200	0295	XXXX	YYYY	-0000	10	2200	295	1384	735	1,24	43,78	22,22	-
		0355				12	2200	355	1683	889	1,25	52,27	26,66	-
		0415				14	2200	415	1978	1034	1,27	60,76	31,11	-
		0475				16	2200	475	2264	1177	1,28	69,26	35,55	-
		0535				18	2200	535	2541	1315	1,29	77,75	40,00	-
		0595				20	2200	595	2807	1445	1,30	86,24	44,44	-
		0655				22	2200	655	3065	1578	1,30	94,78	49,10	-
		0775				26	2200	775	3546	1825	1,30	111,85	58,43	-
		0895				30	2200	895	3984	2051	1,30	128,92	67,76	-
11134	2400	0295	XXXX	YYYY	-0000	10	2400	295	1510	801	1,24	47,76	24,24	-
		0355				12	2400	355	1836	970	1,25	57,02	29,09	-
		0415				14	2400	415	2158	1128	1,27	66,29	33,94	-
		0475				16	2400	475	2470	1284	1,28	75,55	38,78	-
		0535				18	2400	535	2772	1434	1,29	84,82	43,63	-
		0595				20	2400	595	3062	1576	1,30	94,08	48,48	-
		0655				22	2400	655	3343	1721	1,30	103,39	53,57	-
0775	26	2400	775	3869	1992	1,30	122,02	63,74	-					

In conformity with EN442-1: 2014: radiators and convectors


CARRÉ HORIZONTAL (CPHN2-RO)



CPHN2-RO

HOW TO ORDER CARRÉ HORIZONTAL


Delivery time 15 - 30 working days
(transport duration not included)

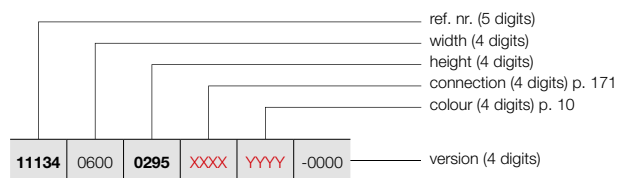

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ø50K)	55/45/20 (Watt) (ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN2-RO : 11134														
11134	2600	0295	XXXX	YYYY	-0000	10	2600	295	1635	868	1,24	51,74	26,26	-
		12				2600	355	1989	1050	1,25	61,78	31,51	-	
		14				2600	415	2337	1222	1,27	71,81	36,76	-	
		16				2600	475	2675	1391	1,28	81,85	42,02	-	
		18				2600	535	3003	1554	1,29	91,88	47,27	-	
		20				2600	595	3318	1708	1,30	101,92	52,52	-	
		22				2600	655	3622	1864	1,30	112,01	58,03	-	
		26				2600	775	4191	2157	1,30	132,18	69,06	-	
11134	2800	0295	XXXX	YYYY	-0000	10	2800	295	1761	935	1,24	55,72	28,28	-
		12				2800	355	2142	1131	1,25	66,53	33,94	-	
		14				2800	415	2517	1316	1,27	77,34	39,59	-	
		16				2800	475	2881	1498	1,28	88,14	45,25	-	
		18				2800	535	3234	1673	1,29	98,95	50,90	-	
		20				2800	595	3573	1839	1,30	109,76	56,56	-	
		22				2800	655	3900	2008	1,30	120,62	62,50	-	
11134	3000	0295	XXXX	YYYY	-0000	10	3000	295	1887	1002	1,24	59,70	30,30	-
		12				3000	355	2295	1212	1,25	71,28	36,36	-	
		14				3000	415	2697	1410	1,27	82,86	42,42	-	
		16				3000	475	3087	1605	1,28	94,44	48,48	-	
		18				3000	535	3465	1793	1,29	106,02	54,54	-	
		20				3000	595	3828	1970	1,30	117,60	60,60	-	
		22				3000	655	4179	2151	1,30	129,24	66,96	-	

In conformity with EN442-1: 2014: radiators and convectors

CARRÉ HORIZONTAL (CPHN1-RO, CPHN2-RO)

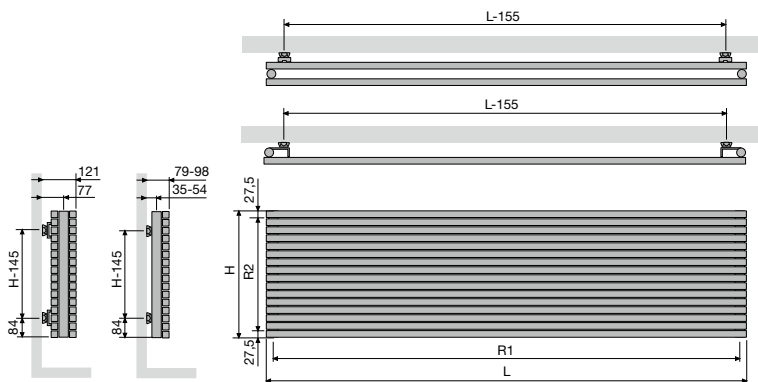

											CPHN1-RO / CPHN2-RO			
Centre between the connections at the bottom 18 (R1)	Width (L)	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000
		565	765	965	1165	1365	1565	1765	1965	2165	2365	2565	2765	2965
Centre between the lateral connections 23/67 (R2)	Height (H)	295	355	415	475	535	595	655	775	895				
		240	300	360	420	480	540	600	720	840				
Centre between the brackets		L-155	H-145											